

# REPORT OF ENVIRONMENTAL SERVICES



**232 East Broad Street**  
Griffin, Spalding County, Georgia

**PREPARED FOR:**

City of Griffin  
232 E Broad Street  
Griffin, Georgia 30223

NOVA Project Number: 10102-3026015

March 18, 2026



March 18, 2026

**City of Griffin**  
232 E Broad Street  
Griffin, Georgia 30223

**Attention:** Mr. Jeremy Stratton CEcD  
Economic Development Manager

**Subject:** Report of Environmental Services  
**232 East Broad Street**  
Griffin, Spalding County, Georgia  
NOVA Project Number 10102-3026015

Mr. Stratton:

**NOVA Engineering and Environmental, LLC (NOVA)** has completed the Environmental Services for the 232 East Broad Street in Griffin, Spalding County, Georgia (Subject Property). We appreciate your selection of NOVA and for the opportunity to be of service on this project. Please feel free to contact us if you have any questions or if we may be of further assistance.

Sincerely,  
**NOVA Engineering and Environmental, LLC**

  
Curtis Moses  
Staff Professional  
Environmental Services  
AHERA No. 20466  
EPA Lead Inspector No. 2141

  
Nickolaus DaSantos  
Business Unit Manager  
Environmental Services  
AHERA No. 20589  
EPA Lead Inspector No. 2251

# TABLE OF CONTENTS

|            |                                                           |          |
|------------|-----------------------------------------------------------|----------|
| <b>1.0</b> | <b>SUMMARY.....</b>                                       | <b>1</b> |
| 1.1        | ASBESTOS CONTAINING MATERIAL.....                         | 1        |
| 1.2        | LEAD BASED PAINT & LEAD CONTAINING PAINT .....            | 2        |
| <b>2.0</b> | <b>INTRODUCTION.....</b>                                  | <b>4</b> |
| 2.1        | DESCRIPTION OF SUBJECT PROPERTY .....                     | 4        |
| 2.2        | PURPOSE.....                                              | 4        |
| 2.3        | LIMITATIONS .....                                         | 4        |
| 2.4        | USER RELIANCE.....                                        | 5        |
| <b>3.0</b> | <b>ASBESTOS CONTAINING MATERIAL.....</b>                  | <b>6</b> |
| 3.1        | FIELD AND LABORATORY SERVICES.....                        | 6        |
| 3.2        | ASBESTOS ABATEMENT .....                                  | 8        |
| <b>4.0</b> | <b>LEAD BASED PAINT &amp; LEAD CONTAINING PAINT .....</b> | <b>9</b> |
| 4.1        | DEFINITIONS .....                                         | 9        |
| 4.2        | FIELD AND LABORATORY SERVICES.....                        | 9        |
| 4.3        | LEAD ABATEMENT ACTIVITIES .....                           | 13       |

## LIST OF APPENDICES

APPENDIX A – SAMPLE LOCATION PLAN  
APPENDIX B – LABORATORY ANALYTICAL DATA & XRF DATA  
APPENDIX C – PERSONNEL QUALIFICATIONS  
APPENDIX D – QUALIFICATIONS OF CONCLUSIONS

## 1.0 SUMMARY

NOVA Engineering and Environmental, LLC. (NOVA) has completed the Environmental Services that include a Pre-Renovation Asbestos Containing Material (ACM) Survey and Lead Based Paint (LBP) Survey for 232 East Broad Street in Griffin, Spalding County, Georgia (Subject Property).

A brief summary of our findings is presented below. This summary is provided for convenience and should not be substituted for review of the full report, including all attachments as provided herein.

### 1.1 ASBESTOS CONTAINING MATERIAL

During this study, forty-one (41) samples (containing 54 total layers) floor tile, mastic, glue, joint compound, wallboard, plaster, Thermal System Insulation (TSI), glazing, tape, adhesive, caulking, grout, mortar, texturing, and floor sheeting were analyzed by NOVA using Polarized Light Microscopy (PLM) with ten (10) analyzed sample layers indicating Asbestos Containing Material (ACM). A sample location plan is included in Appendix A of this Report.

#### Thermal System Insulation (TSI) - Elbow

- A total of three (3) samples of the Thermal System Insulation (TSI) elbows located at the Subject Property indicated >1% asbestos (50% - 60% Chrysotile Asbestos). Consequently, we believe all of the TSI elbows located at the Subject Property should be considered Asbestos Containing Material (ACM).

#### Thermal System Insulation (TSI) - Run

- A total of three (3) samples of the Thermal System Insulation (TSI) runs located at the Subject Property indicated >1% asbestos (30% Chrysotile Asbestos). Consequently, we believe all of the TSI runs located at the Subject Property should be considered Asbestos Containing Material (ACM).

#### Black Mastic

- A total of two (2) samples of the black mastic associated with the concrete slabs and floor tile located at the Subject Property indicated >1% asbestos (5% Chrysotile Asbestos). Consequently, we believe all of the black mastic located at the Subject Property should be considered Asbestos Containing Material (ACM).

### **9-Inch Floor Tile**

- A total of two (2) samples of the 9-inch floor tile located at the Subject Property indicated >1% asbestos (3% Chrysotile Asbestos). Consequently, we believe all of the 9-inch floor tile located at the Subject Property should be considered Asbestos Containing Material (ACM).

A complete list of suspected ACM samples obtained is shown in the laboratory report (included in Appendix B). **Determination of the actual quantities of ACM at all locations should be made by the abatement contractor during a site inspection prior to beginning abatement.**

## **1.2 LEAD BASED PAINT & LEAD CONTAINING PAINT**

One hundred twenty-six (126) X-ray fluorescence (XRF) analyzer readings were made by NOVA throughout the interior of the Subject Property structure to determine the presence of Lead Based Paint (LBP).

The predominant LBP material identified by the NOVA survey include:

- Painted surfaces of wood windows, doors, and frames located at the Subject Property.
- Painted surfaces of metal doors, windows, frames, floor plates, radiators, pipes, stairs, and cells located at the Subject Property.
- Painted surfaces of concrete floors located at the Subject Property.
- Painted surfaces of plaster walls, ceilings, and trim located at the Subject Property.

### **Lead Containing Paint**

OSHA does not define Lead Based Paint based on lead content. Any detectable lead in a paint or varnish makes it lead paint for purposes of complying with OSHA regulations to determine worker exposure. Consequently, for purposes of this study, Lead Containing Paint is considered any detectable level of lead.

The predominant LCP material identified by the NOVA survey include:

- Painted surfaces of wood windows and frames located at the Subject Property.
- Painted surfaces of metal doors, windows, frames, floor plates, and pipes located at the Subject Property.

- Painted surfaces of plaster walls located at the Subject Property.

## 2.0 INTRODUCTION

### 2.1 DESCRIPTION OF SUBJECT PROPERTY

The Subject Property is identified as 232 East Broad Street in Griffin, Spalding County, Georgia (Subject Property). Specifically, for the purposes of these Environmental Services, the Subject Property includes a two (2) story brick framed approximately 32,000 square foot office space.

### 2.2 PURPOSE

As requested by City of Griffin (CLIENT), the Pre-Renovation Asbestos Containing Material Survey and Lead Based Paint Survey was performed in an effort to identify Asbestos-Containing Material (ACM) and Lead Based Paint (LBP) at the Subject Property. This work has been performed in general accordance with applicable state and federal regulations, and routine industry practice.

ACM sampling was performed in general accordance with the Asbestos Hazard Emergency Response Act (AHERA) guidelines and ASTM E2356-18, "*Standard Practice for Comprehensive Building Asbestos Survey*" as a Baseline Survey. Deviations from the Baseline Survey protocols include:

- Determination of ACM quantities were excluded from the scope of work

### 2.3 LIMITATIONS

NOVA has performed the Pre-Renovation Asbestos Containing Material Survey and Lead Based Paint Survey, which is a limited inquiry into a property's environmental status and is not sufficient to discover every potential source of ACM or LBP of the property to be evaluated. No survey/sampling can wholly eliminate uncertainty regarding the potential ACM or LBP in connection with a property. Performance of this practice is intended to reduce, but not eliminate, uncertainty regarding the potential for ACM and LBP in connection with a property.

The level of inquiry is variable. Not every property will warrant the same level of assessment for ACM and LBP. Consistent with good commercial or customary practices, the appropriate level of assessment will be guided by the type of property subject to assessment, the intended use of the property, the expertise and risk tolerance of the CLIENT, and the information developed in the course of the assessment.

NOVA's findings, opinions, conclusions and recommendations are based on information obtained through visual assessment of surficial conditions in readily accessible areas. It is possible that additional ACM or LBP exist or may subsequently become known that may impact or change the assessment after NOVA's services are complete.

NOVA's assessment represents our professional opinion, only. Therefore, NOVA cannot, under any circumstances, make a statement of warranty or guarantee, expressed or implied, that ACM and LBP are limited to those that are discovered while we are performing the Sampling.

## **2.4 USER RELIANCE**

NOVA's Pre-Renovation Asbestos Containing Material Survey and Lead Based Paint Survey, along with the findings and conclusions contained in the report, either in completed form, summary form, or by extraction, is prepared, and intended, for the sole use of City of Griffin (CLIENT) and therefore may not contain sufficient information for other purposes or parties. The CLIENT is the only intended beneficiary of this report. The contents of NOVA's report will continue to be the property of NOVA. NOVA's report may not be disclosed to, used by, or relied upon by, any person or entity other than the CLIENT without the express written consent of NOVA.

Authorization for disclosure to a third party or authorization for third-party reliance on a final report of any report will be considered by NOVA upon the written request of the CLIENT. NOVA reserves the right to deny authorization to allow disclosure or reliance of NOVA's report to third parties.

## 3.0 ASBESTOS CONTAINING MATERIAL

### 3.1 FIELD AND LABORATORY SERVICES

Mr. Curtis Moses, a NOVA professional, and federal and state certified asbestos inspector, performed the field work for the Pre-Renovation Asbestos Containing Material Survey at the Subject Property.

#### 3.1.1 ASBESTOS CONTAINING MATERIAL SAMPLING

The building area was visually assessed by NOVA to identify suspect ACM, which were then grouped into three categories according to their intended use:

- **Surfacing Material** such as sprayed-on or troweled fireproofing, acoustical and decorative insulation, textured “popcorn” finishes, paint, stucco, etc.
- **Thermal System Insulation (TSI)**, such as pipe, boiler and storage tank insulation, and insulation on ducts, pumps, heat exchangers, and other equipment.
- **Miscellaneous Material**, such as floor and ceiling tiles, wallboard, asbestos-cement board, siding and other building material that did not fall into one of the previously mentioned categories.

Where applicable, material with similar texture, color and general appearance were considered homogeneous for sampling purposes, including visually similar material on different floors. NOVA’s assessment also included touching representative samples to determine friability, a mechanical classification defined as whether a material can be crumbled, pulverized, or reduced to powder by hand pressure.

Bulk samples were subsequently obtained in general accordance with the AHERA (40 CFR 763.86, Sampling) and ASTM E2356-18 procedures. The samples were placed in appropriate containers, and the containers sealed and labeled with a unique identification number. The samples were subsequently transported (following routine industry practices and chain-of-custody procedures) to EMSL Analytical, LLC (EMSL) for analysis.

The ACM samples were analyzed for asbestos using Polarized Light Microscopy (PLM) methods in accordance with EPA Method 600/R-93/116. Copies of the complete asbestos laboratory report and chain-of custody are included in Appendix B.

Using the results of the laboratory analysis and NOVA’s visual assessment, the asbestos containing building material can be further categorized into three groups:

- **Friable ACM** - Material means any material containing more than one percent (1%) asbestos as determined using the method specified in Appendix A, Subpart F, 40 CFR part 763 Section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.
- **Category I Nonfriable ACM** - Asbestos-containing packing, gaskets, resilient floor covering, and asphalt roofing products containing more than one percent (1%) asbestos as determined using the method specified in Appendix A, Subpart F, 40 CFR part 763, Section 1, Polarized Light Microscopy.
- **Category II Nonfriable ACM** - Any material, excluding Category I Nonfriable ACM, containing more than one percent (1%) asbestos as determined using the methods specified in Appendix A, Subpart F, 40 CFR part 763, Section 1, Polarized Light Microscopy that, when dry, *cannot* be crumbled, pulverized, or reduced to powder by hand pressure.

During this study, forty-one (41) samples (containing 54 total layers) floor tile, mastic, glue, joint compound, wallboard, plaster, Thermal System Insulation (TSI), glazing, tape, adhesive, caulking, grout, mortar, texturing, and floor sheeting were analyzed by NOVA using Polarized Light Microscopy (PLM) with ten (10) analyzed sample layers indicating Asbestos Containing Material (ACM). A sample location plan is included in Appendix A of this Report.

#### **Thermal System Insulation (TSI) - Elbow**

- A total of three (3) samples of the Thermal System Insulation (TSI) elbows located at the Subject Property indicated >1% asbestos (50% - 60% Chrysotile Asbestos). Consequently, we believe all of the TSI elbows located at the Subject Property should be considered Asbestos Containing Material (ACM).

#### **Thermal System Insulation (TSI) - Run**

- A total of three (3) samples of the Thermal System Insulation (TSI) runs located at the Subject Property indicated >1% asbestos (30% Chrysotile Asbestos). Consequently, we believe all of the TSI runs located at the Subject Property should be considered Asbestos Containing Material (ACM).

#### **Black Mastic**

- A total of two (2) samples of the black mastic associated with the concrete slabs and floor tile located at the Subject Property indicated >1% asbestos (5% Chrysotile Asbestos). Consequently, we believe all of the black mastic located at the Subject Property should be considered Asbestos Containing Material (ACM).

### **9-Inch Floor Tile**

- A total of two (2) samples of the 9-inch floor tile located at the Subject Property indicated >1% asbestos (3% Chrysotile Asbestos). Consequently, we believe all of the 9-inch floor tile located at the Subject Property should be considered Asbestos Containing Material (ACM).

A complete list of suspected ACM samples obtained is shown in the laboratory report (included in Appendix B). **Determination of the actual quantities of ACM at all locations should be made by the abatement contractor during a site inspection prior to beginning abatement.**

## **3.2 ASBESTOS ABATEMENT**

Any component, which is similar in appearance to, and is in the general vicinity or similar application of samples identified as containing asbestos, as well as any other materials not shown by proper sampling and analysis to be non-asbestos containing, should be handled as asbestos-containing materials (ACMs). As previously noted, determination of the actual quantities of ACMs at all locations should be made by the contractor during a site inspection prior to beginning abatement.

ACM should be abated (removed) prior to disturbance by maintenance, renovation and/or demolition by a licensed asbestos abatement contractor and disposed at an approved solid waste disposal facility.

Abatement is highly regulated and consists of several parts. In addition to the demolition/renovation permit, a ten (10) day advance notification to the Georgia Environmental Protection Division (GA-EPD) is required.

During abatement, third party monitoring is recommended to review if the asbestos is adequately managed and contained during the abatement process and to document clearance and re-occupancy criteria established for the project.

Most Clients also request an abatement management report. This report compiles pertinent data regarding the personnel, abatement, and asbestos disposal for liability management after the fact should there be concerns later from workers or others. The ten (10) day notice, abatement, third party oversight, and management report are not included with the authorized scope of work for this project, but we can provide these supplemental services, if desired. Please note that the means and methods necessary for ACM abatement, as well as worker protection and monitoring, are the sole responsibility of the abatement contractor.

## 4.0 LEAD BASED PAINT & LEAD CONTAINING PAINT

### 4.1 DEFINITIONS

**Lead Based Paint (LBP)** is defined as a paint or varnish containing lead at a concentration  $>0.5\%$  by weight when determined by laboratory analysis, (1972, Lead Based Paint Poison Prevention Act (LBPPPA)). LBP is also defined by HUD as  $1.0 \text{ mg/cm}^2$  when determined using x-ray fluorescence (XRF) analyzer. These concentrations are applicable for housing and child-care facilities; however, these concentration levels are also frequently used as targets in commercial projects to allow flexibility in future area usage.

**Lead Containing Paint (LCP)** was defined as a paint or varnish containing lead at a concentration  $>0.06\%$  by weight (600 ppm) when determined by laboratory analysis, (1978, LBPPPA). In 2009, LCP was further defined as containing lead at a concentration  $>0.009\%$  by weight (90 ppm) for certain consumer products and residential use.

*Please note that OSHA does not define Lead Based Paint based on lead content. Any detectable lead in a paint or varnish makes it lead paint for purposes of complying with OSHA regulations to determine worker exposure. Consequently, for purposes of this study, Lead Containing Paint is considered any detectable lead.*

### 4.2 FIELD AND LABORATORY SERVICES

Mr. Curtis Moses, a NOVA professional and EPA certified lead inspector, performed the field work for the Lead Based Paint Survey at the Subject Property.

One hundred twenty-six (126) X-ray fluorescence (XRF) analyzer readings were made by NOVA throughout the interior of the Subject Property structure to determine the presence of Lead Based Paint (LBP).

#### 4.2.1 LEAD BASED PAINT SAMPLING

Where applicable, material with similar texture, color and general appearance were considered homogeneous for sampling purposes, including visually similar material on different floors and/or different buildings.

NOVA's XRF readings are presented below:

| No. | Time           | Units      | Component   | Substrate | Side | Condition | Color | Results  | PbC  | Error |
|-----|----------------|------------|-------------|-----------|------|-----------|-------|----------|------|-------|
| 1   | 2/26/2026 9:26 | cps        |             |           |      |           |       |          | 0.59 | 0     |
| 2   | 2/26/2026 9:30 | mg / cm ^2 | calibration |           |      |           |       | positive | 1.1  | 0.1   |
| 3   | 2/26/2026 9:34 | mg / cm ^2 | calibration |           |      |           |       | positive | 1.1  | 0.1   |

| No. | Time            | Units      | Component   | Substrate | Side | Condition | Color  | Results  | PbC   | Error |
|-----|-----------------|------------|-------------|-----------|------|-----------|--------|----------|-------|-------|
| 4   | 2/26/2026 9:38  | mg / cm ^2 | calibration |           |      |           |        | positive | 1.1   | 0.1   |
| 5   | 2/26/2026 10:08 | mg / cm ^2 | wall        | brick     | D    | poor      | red    | negative | < LOD | 0.03  |
| 6   | 2/26/2026 10:09 | mg / cm ^2 | wall        | brick     | D    | poor      | red    | negative | < LOD | 0.03  |
| 7   | 2/26/2026 10:09 | mg / cm ^2 | window      | wood      | D    | poor      | white  | negative | < LOD | 0.03  |
| 8   | 2/26/2026 10:10 | mg / cm ^2 | window      | wood      | D    | poor      | white  | negative | < LOD | 0.03  |
| 9   | 2/26/2026 10:10 | mg / cm ^2 | window      | wood      | D    | poor      | white  | negative | < LOD | 0.03  |
| 10  | 2/26/2026 10:11 | mg / cm ^2 | window      | wood      | C    | poor      | white  | positive | 19.35 | 8     |
| 11  | 2/26/2026 10:12 | mg / cm ^2 | window      | wood      | C    | poor      | white  | negative | < LOD | 0.03  |
| 12  | 2/26/2026 10:12 | mg / cm ^2 | window      | wood      | C    | poor      | white  | negative | < LOD | 0.03  |
| 13  | 2/26/2026 10:12 | mg / cm ^2 | window      | wood      | C    | poor      | white  | negative | < LOD | 0.03  |
| 14  | 2/26/2026 10:13 | mg / cm ^2 | door        | metal     | C    | poor      | white  | negative | < LOD | 0.03  |
| 15  | 2/26/2026 10:13 | mg / cm ^2 | door        | metal     | C    | poor      | white  | negative | < LOD | 0.03  |
| 16  | 2/26/2026 10:14 | mg / cm ^2 | floor       | concrete  | C    | poor      | gray   | negative | < LOD | 0.03  |
| 17  | 2/26/2026 10:16 | mg / cm ^2 | wall        | brick     | C    | poor      | red    | negative | < LOD | 0.03  |
| 18  | 2/26/2026 10:17 | mg / cm ^2 | post        | metal     | C    | poor      | yellow | negative | < LOD | 0.03  |
| 19  | 2/26/2026 10:18 | mg / cm ^2 | post        | metal     | C    | poor      | yellow | negative | < LOD | 0.03  |
| 20  | 2/26/2026 10:19 | mg / cm ^2 | window      | wood      | B    | poor      | white  | negative | < LOD | 0.03  |
| 21  | 2/26/2026 10:19 | mg / cm ^2 | window      | wood      | B    | poor      | white  | negative | < LOD | 0.03  |
| 22  | 2/26/2026 10:19 | mg / cm ^2 | window      | wood      | B    | poor      | white  | negative | < LOD | 0.03  |
| 23  | 2/26/2026 10:19 | mg / cm ^2 | door        | metal     | B    | poor      | white  | positive | 1.95  | 1     |
| 24  | 2/26/2026 10:20 | mg / cm ^2 | door        | metal     | B    | poor      | white  | negative | 0.15  | 0.03  |
| 25  | 2/26/2026 10:22 | mg / cm ^2 | window      | wood      | B    | poor      | white  | negative | 0.21  | 0.5   |
| 26  | 2/26/2026 10:22 | mg / cm ^2 | window      | wood      | B    | poor      | white  | negative | < LOD | 0.03  |
| 27  | 2/26/2026 10:23 | mg / cm ^2 | window      | wood      | B    | poor      | white  | negative | 0.6   | 0.1   |
| 28  | 2/26/2026 10:23 | mg / cm ^2 | window      | wood      | A    | poor      | white  | positive | 23.1  | 10.1  |
| 29  | 2/26/2026 10:23 | mg / cm ^2 | window      | wood      | A    | poor      | white  | negative | 0.49  | 0.2   |
| 30  | 2/26/2026 10:23 | mg / cm ^2 | window      | wood      | A    | poor      | white  | negative | < LOD | 0.03  |
| 31  | 2/26/2026 10:23 | mg / cm ^2 | window      | wood      | A    | poor      | white  | positive | 1.04  | 0.1   |
| 32  | 2/26/2026 10:24 | mg / cm ^2 | window      | wood      | A    | poor      | white  | negative | 0.24  | 0.03  |
| 33  | 2/26/2026 10:24 | mg / cm ^2 | window      | wood      | A    | poor      | white  | negative | 0.52  | 0.03  |
| 34  | 2/26/2026 10:24 | mg / cm ^2 | window      | wood      | A    | poor      | white  | positive | 8.25  | 1.2   |
| 35  | 2/26/2026 10:24 | mg / cm ^2 | door        | wood      | A    | poor      | white  | negative | < LOD | 0.03  |
| 36  | 2/26/2026 10:24 | mg / cm ^2 | door        | wood      | A    | poor      | white  | negative | < LOD | 0.03  |
| 37  | 2/26/2026 10:28 | mg / cm ^2 | wall        | plaster   | A    | gray      | white  | positive | 17.25 | 10    |
| 38  | 2/26/2026 10:29 | mg / cm ^2 | wall        | plaster   | A    | gray      | white  | positive | 8.7   | 4     |
| 39  | 2/26/2026 10:29 | mg / cm ^2 | window      | metal     | A    | gray      | white  | negative | 0.39  | 0.03  |
| 40  | 2/26/2026 10:30 | mg / cm ^2 | window      | metal     | A    | gray      | white  | positive | 4.5   | 1.2   |
| 41  | 2/26/2026 10:30 | mg / cm ^2 | door        | metal     | B    | gray      | gray   | positive | 30.15 | 10    |
| 42  | 2/26/2026 10:30 | mg / cm ^2 | door        | metal     | B    | gray      | gray   | positive | 4.05  | 4.05  |
| 43  | 2/26/2026 10:31 | mg / cm ^2 | wall        | plaster   | B    | poor      | gray   | positive | 1.05  | 1.05  |
| 44  | 2/26/2026 10:31 | mg / cm ^2 | wall        | plaster   | B    | poor      | gray   | negative | 0.91  | 0.3   |
| 45  | 2/26/2026 10:31 | mg / cm ^2 | wall        | plaster   | B    | poor      | gray   | positive | 5.25  | 1.2   |
| 46  | 2/26/2026 10:32 | mg / cm ^2 | window      | metal     | B    | poor      | white  | positive | 22.5  | 10    |
| 47  | 2/26/2026 10:32 | mg / cm ^2 | window      | wood      | B    | poor      | yellow | positive | 24.75 | 12    |

| No. | Time            | Units      | Component | Substrate | Side | Condition | Color  | Results  | PbC   | Error |
|-----|-----------------|------------|-----------|-----------|------|-----------|--------|----------|-------|-------|
| 48  | 2/26/2026 10:33 | mg / cm ^2 | floor     | metal     | B    | poor      | gray   | positive | 3.15  | 1.2   |
| 49  | 2/26/2026 10:34 | mg / cm ^2 | wall      | plaster   | C    | poor      | gray   | positive | 1.57  | 0.4   |
| 50  | 2/26/2026 10:34 | mg / cm ^2 | wall      | plaster   | C    | poor      | gray   | positive | 2.7   | 1.1   |
| 51  | 2/26/2026 10:34 | mg / cm ^2 | wall      | plaster   | C    | poor      | gray   | negative | <LOD  | 0.03  |
| 52  | 2/26/2026 10:34 | mg / cm ^2 | wall      | plaster   | C    | poor      | gray   | positive | 8.85  | 3.4   |
| 53  | 2/26/2026 10:35 | mg / cm ^2 | window    | metal     | C    | poor      | yellow | positive | 9     | 2     |
| 54  | 2/26/2026 10:35 | mg / cm ^2 | radiator  | metal     | C    | poor      | yellow | positive | 6.75  | 3     |
| 55  | 2/26/2026 10:35 | mg / cm ^2 | wall      | plaster   | D    | poor      | gray   | positive | 10.2  | 4.3   |
| 56  | 2/26/2026 10:36 | mg / cm ^2 | wall      | plaster   | D    | poor      | gray   | negative | < LOD | 0.03  |
| 57  | 2/26/2026 10:36 | mg / cm ^2 | wall      | plaster   | D    | poor      | gray   | negative | 0.36  | 0.1   |
| 58  | 2/26/2026 10:36 | mg / cm ^2 | door      | metal     | D    | poor      | gray   | positive | 28.2  | 12    |
| 59  | 2/26/2026 10:36 | mg / cm ^2 | door      | metal     | D    | poor      | gray   | positive | 9     | 2.2   |
| 60  | 2/26/2026 10:37 | mg / cm ^2 | floor     | concrete  | D    | poor      | gray   | negative | < LOD | 0.03  |
| 61  | 2/26/2026 10:38 | mg / cm ^2 | floor     | concrete  | D    | poor      | gray   | negative | < LOD | 0.03  |
| 62  | 2/26/2026 10:38 | mg / cm ^2 | floor     | concrete  | D    | poor      | gray   | positive | 1.8   | 0.5   |
| 63  | 2/26/2026 10:38 | mg / cm ^2 | riser     | metal     | A    | poor      | brown  | negative | < LOD | 0.03  |
| 64  | 2/26/2026 10:39 | mg / cm ^2 | riser     | metal     | C    | poor      | brown  | negative | < LOD | 0.03  |
| 65  | 2/26/2026 10:40 | mg / cm ^2 | cells     | metal     | C    | poor      | gray   | positive | 30.6  | 12.4  |
| 66  | 2/26/2026 10:40 | mg / cm ^2 | pipe      | metal     | C    | poor      | gray   | positive | 41.1  | 6     |
| 67  | 2/26/2026 10:40 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 64.8  | 10    |
| 68  | 2/26/2026 10:40 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 8.4   | 2     |
| 69  | 2/26/2026 10:41 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 25.2  | 11.2  |
| 70  | 2/26/2026 10:41 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 26.7  | 14.6  |
| 71  | 2/26/2026 10:41 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 5.25  | 1.22  |
| 72  | 2/26/2026 10:42 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 9.15  | 2.43  |
| 73  | 2/26/2026 10:42 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 46.95 | 4.56  |
| 74  | 2/26/2026 10:43 | mg / cm ^2 | ceiling   | plaster   | A    | poor      | white  | positive | 22.95 | 6.22  |
| 75  | 2/26/2026 10:45 | mg / cm ^2 | stairs    | metal     | A    | poor      | black  | positive | 56.7  | 12    |
| 76  | 2/26/2026 10:45 | mg / cm ^2 | wall      | plaster   | A    | poor      | yellow | negative | 0.12  | 0.03  |
| 77  | 2/26/2026 10:45 | mg / cm ^2 | wall      | plaster   | A    | poor      | yellow | negative | < LOD | 0.03  |
| 78  | 2/26/2026 10:46 | mg / cm ^2 | pipe      | metal     | A    | poor      | gray   | positive | 1.07  | 0.04  |
| 79  | 2/26/2026 10:46 | mg / cm ^2 | pipe      | metal     | A    | poor      | gray   | negative | 0.35  | 0.03  |
| 80  | 2/26/2026 10:47 | mg / cm ^2 | wall      | plaster   | B    | poor      | black  | positive | 8     | 5.2   |
| 81  | 2/26/2026 10:47 | mg / cm ^2 | wall      | plaster   | C    | poor      | black  | positive | 3.15  | 1.1   |
| 82  | 2/26/2026 10:47 | mg / cm ^2 | tread     | metal     | C    | poor      | black  | positive | 3.15  | 1.1   |
| 83  | 2/26/2026 10:48 | mg / cm ^2 | floor     | metal     | C    | poor      | black  | negative | 0.21  | 0.03  |
| 84  | 2/26/2026 10:49 | mg / cm ^2 | door      | metal     | C    | poor      | white  | negative | 0.33  | 0.03  |
| 85  | 2/26/2026 10:49 | mg / cm ^2 | door      | metal     | D    | poor      | white  | positive | 1.2   | 0.2   |
| 86  | 2/26/2026 10:51 | mg / cm ^2 | wall      | plaster   | D    | poor      | white  | positive | 1.2   | 0.2   |
| 87  | 2/26/2026 10:52 | mg / cm ^2 | wall      | plaster   | D    | poor      | white  | negative | < LOD | 0.03  |
| 88  | 2/26/2026 10:53 | mg / cm ^2 | wall      | plaster   | D    | poor      | green  | positive | 1.65  | 0.55  |
| 89  | 2/26/2026 10:54 | mg / cm ^2 | wall      | plaster   | D    | poor      | green  | positive | 3.9   | 1.2   |
| 90  | 2/26/2026 10:54 | mg / cm ^2 | trim      | plaster   | D    | poor      | green  | positive | 3.15  | 1.2   |
| 91  | 2/26/2026 10:55 | mg / cm ^2 | wall      | plaster   | D    | poor      | green  | positive | 8.25  | 3.2   |

| No. | Time            | Units      | Component   | Substrate | Side | Condition | Color | Results  | PbC   | Error |
|-----|-----------------|------------|-------------|-----------|------|-----------|-------|----------|-------|-------|
| 92  | 2/26/2026 10:56 | mg / cm ^2 | wall        | plaster   | D    | poor      | green | negative | 0.64  | 0.1   |
| 93  | 2/26/2026 10:57 | mg / cm ^2 | wall        | plaster   | D    | poor      | green | positive | 5.85  | 2.4   |
| 94  | 2/26/2026 10:57 | mg / cm ^2 | wall        | plaster   | D    | poor      | green | positive | 8.4   | 5.3   |
| 95  | 2/26/2026 10:57 | mg / cm ^2 | wall        | plaster   | D    | poor      | green | positive | 34.5  | 8.2   |
| 96  | 2/26/2026 10:57 | mg / cm ^2 | wall        | plaster   | D    | poor      | green | positive | 32.85 | 8     |
| 97  | 2/26/2026 10:58 | mg / cm ^2 | window      | wood      | D    | poor      | white | negative | 0.75  | 0.1   |
| 98  | 2/26/2026 10:58 | mg / cm ^2 | window      | wood      | D    | poor      | white | positive | 2.85  | 1.1   |
| 99  | 2/26/2026 10:58 | mg / cm ^2 | window      | wood      | D    | poor      | white | negative | < LOD | 0.03  |
| 100 | 2/26/2026 10:58 | mg / cm ^2 | window      | wood      | D    | poor      | white | positive | 1.2   | 0.3   |
| 101 | 2/26/2026 10:59 | mg / cm ^2 | window      | wood      | A    | poor      | white | positive | 3.3   | 1.1   |
| 102 | 2/26/2026 10:59 | mg / cm ^2 | door        | wood      | D    | poor      | white | negative | < LOD | 0.03  |
| 103 | 2/26/2026 10:59 | mg / cm ^2 | door        | wood      | D    | poor      | white | negative | < LOD | 0.03  |
| 104 | 2/26/2026 10:59 | mg / cm ^2 | door        | wood      | B    | poor      | white | negative | < LOD | 0.03  |
| 105 | 2/26/2026 11:00 | mg / cm ^2 | door        | wood      | B    | poor      | white | negative | < LOD | 0.03  |
| 106 | 2/26/2026 11:00 | mg / cm ^2 | window      | wood      | B    | poor      | white | positive | 2.7   | 1.2   |
| 107 | 2/26/2026 11:00 | mg / cm ^2 | window      | wood      | B    | poor      | white | positive | 7.05  | 3.5   |
| 108 | 2/26/2026 11:09 | mg / cm ^2 | door        | wood      | A    | poor      | white | negative | < LOD | 0.03  |
| 109 | 2/26/2026 11:09 | mg / cm ^2 | door        | wood      | A    | poor      | white | negative | < LOD | 0.03  |
| 110 | 2/26/2026 11:09 | mg / cm ^2 | wall        | window    | B    | poor      | white | negative | < LOD | 0.03  |
| 111 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | B    | poor      | green | positive | 8.4   | 2.8   |
| 112 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | B    | poor      | green | positive | 11.85 | 4.3   |
| 113 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | B    | poor      | green | positive | 44.25 | 12.5  |
| 114 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | B    | poor      | green | positive | 16.5  | 8.8   |
| 115 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | B    | poor      | green | positive | 42.9  | 13.4  |
| 116 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | B    | poor      | green | positive | 15.3  | 4.4   |
| 117 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | A    | poor      | green | positive | 49.8  | 16.4  |
| 118 | 2/26/2026 11:11 | mg / cm ^2 | window      | wood      | A    | poor      | white | positive | 3.9   | 1.8   |
| 119 | 2/26/2026 11:11 | mg / cm ^2 | window      | wood      | A    | poor      | white | negative | 0.12  | 0.03  |
| 120 | 2/26/2026 11:11 | mg / cm ^2 | window      | wood      | A    | poor      | white | negative | 0.19  | 0.03  |
| 121 | 2/26/2026 11:11 | mg / cm ^2 | window      | wood      | B    | poor      | white | negative | 0.1   | 0.03  |
| 122 | 2/26/2026 11:11 | mg / cm ^2 | door        | wood      | A    | poor      | white | positive | 3.75  | 1.3   |
| 123 | 2/26/2026 11:12 | mg / cm ^2 | door        | wood      | A    | poor      | white | positive | 6     | 2.2   |
| 124 | 2/26/2026 11:23 | mg / cm ^2 | calibration |           |      |           |       | negative | 1.1   | 0.1   |
| 125 | 2/26/2026 11:23 | mg / cm ^2 | calibration |           |      |           |       | negative | 1.1   | 0.1   |
| 126 | 2/26/2026 11:23 | mg / cm ^2 | calibration |           |      |           |       | negative | 1.1   | 0.1   |

< LOD = below level of detection

### **Lead Based Paint**

Lead Based Paint (LBP) is defined as a paint or varnish containing lead at a concentration >0.5% by weight when determined by laboratory analysis. LBP is also defined by HUD as 1.0 mg/cm<sup>2</sup> when determined using an XRF analyzer.

The predominant LBP material identified by the NOVA survey include:

- Painted surfaces of wood windows, doors, and frames located at the Subject Property.
- Painted surfaces of metal doors, windows, frames, floor plates, radiators, pipes, stairs, and cells located at the Subject Property.
- Painted surfaces of concrete floors located at the Subject Property.
- Painted surfaces of plaster walls, ceilings, and trim located at the Subject Property.

#### **Lead Containing Paint**

OSHA does not define Lead Based Paint based on lead content. Any detectable lead in a paint or varnish makes it lead paint for purposes of complying with OSHA regulations to determine worker exposure. Consequently, for purposes of this study, Lead Containing Paint is considered any detectable level of lead.

The predominant LCP material identified by the NOVA survey include:

- Painted surfaces of wood windows and frames located at the Subject Property.
- Painted surfaces of metal doors, windows, frames, floor plates, and pipes located at the Subject Property.
- Painted surfaces of plaster walls located at the Subject Property.

### **4.3 LEAD ABATEMENT ACTIVITIES**

The US EPA has stated that solid architectural components coated with LBP are less likely to be hazardous because of the small ratio of lead paint to total waste mass (*US EPA, 1993, Applicability of RCRA Disposal Requirements to Lead-Based Paint Abatement Wastes, Final Report, EPA 747-R-93-006 Technical Programs Branch, Office of Pollution Prevention and Toxics, March 1993*).

The US Army conducted a study which concluded that whole-building demolition debris is not likely to exceed the toxicity characteristic standard for lead if it is handled as a single, whole waste stream and disposed of all together (*US Dept. of the Army, US Army Environmental Hygiene Agency, Interim Final Report, Lead-Based Paint Contaminated Debris Waste Characterization Study No. 27-26-JK44-92. May 1993*). Consequently, whole-building demolition debris is typically considered a non-hazardous waste with regard to lead under RCRA.

We believe the greatest impact of LBP and/or LCP may be on the contractor's salvage activities of railing, doorframes, etc., particularly activities that include cutting, grinding, sanding or scraping. As previously noted, OSHA does not define lead paint based on content. Any detectable lead in paint makes it lead paint for purposes of complying with OSHA regulations to determine worker exposure.

- The contractor must conduct an initial exposure assessment of all workplaces and operations where lead or lead-containing material is being used, disturbed or removed to determine whether any employee may be exposed to lead at or above the action level.
- Personnel involved in LBP or LCP must be monitored and directed by a Competent Person who will determine appropriate compliance controls and procedures.
- The Lead in Construction standard's action level is 30 ug/m<sup>3</sup> calculated as an 8-hour time-weighted average.

In addition, on April 22, 2008, EPA issued a rule requiring the use of lead-safe practices and other actions aimed at preventing lead poisoning. Under the rule, beginning April 22, 2010, contractors performing abatement, renovation, repair and painting projects that disturb lead-based paint in homes, child-care facilities, and schools (K-12) built before 1978 must be certified by EPA and must follow specific lead-safe work practices to prevent lead contamination.

Persons performing lead-based paint (LBP) abatement activities must:

- Be certified
- Work for a Certified Lead Firm

Persons performing renovation work must:

- Be a certified Renovator
- Work for a Certified Renovation Firm

The EPA and the also regulate the LBP and LCP waste stream resulting from abatement and renovation activities. A potential lead waste material must be analyzed for toxicity using the Toxicity Characteristic Leachate Procedure (TCLP).

- If TCLP results from waste stream of paint chips, dust (including dust from floor refinishing operations), soil, and/or stripper sludge are less than 5 milligrams per liter (5 parts per million or ppm), the waste may usually go to a municipal solid waste (MSW) or construction debris (CD) landfill, depending on concentrations and landfill operator requirements.
- If greater than 5 milligrams per liter (5 ppm) must comply with Georgia State Rules for Hazardous Waste Management.

Please note that the means and methods necessary for LBP and/or LCP abatement or demolition, as well as worker protection and monitoring, are the sole responsibility of the contractor.

## APPENDIX A

### SAMPLE LOCATION PLAN

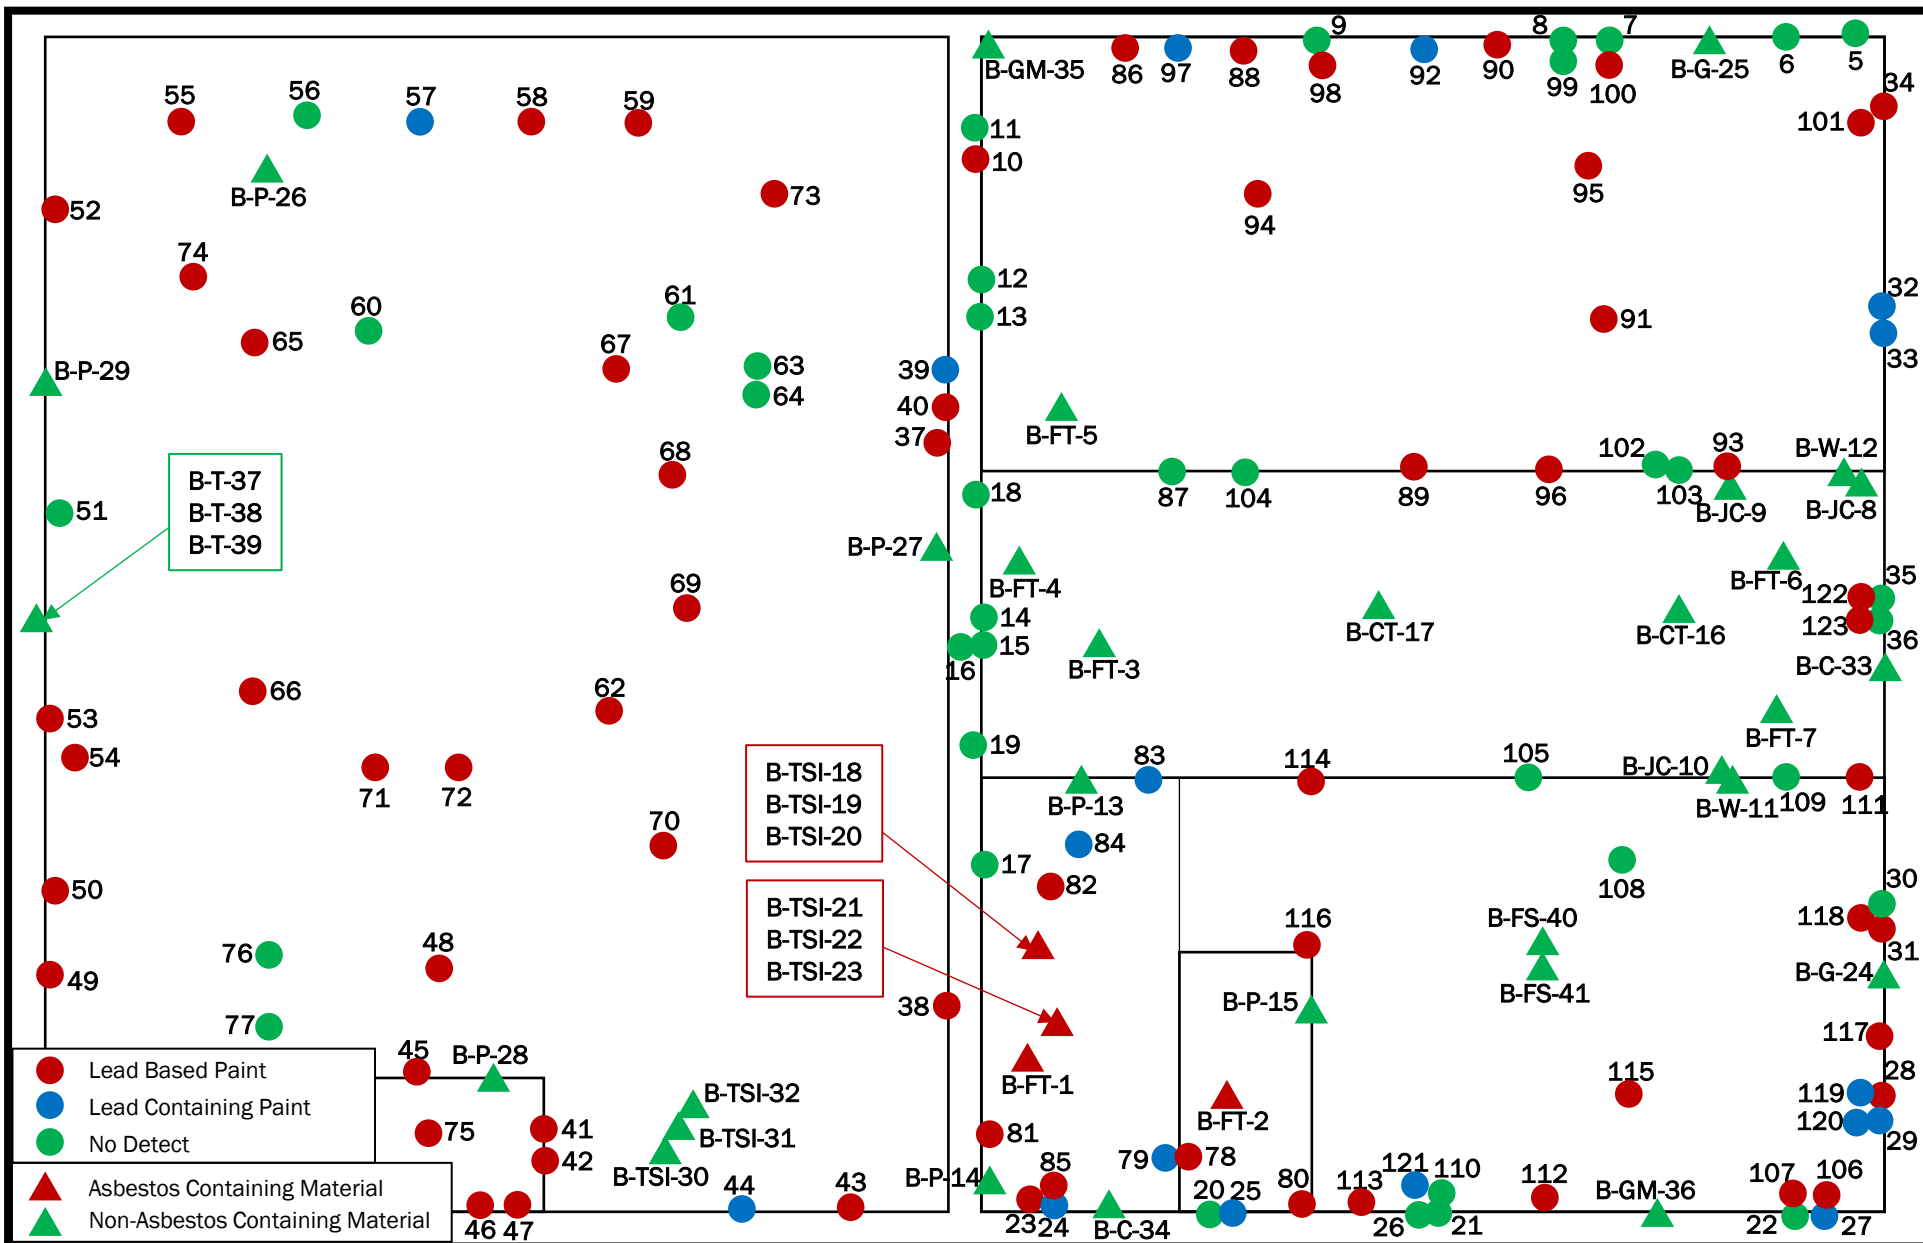


FIGURE  
NOT TO SCALE



CITY OF GRIFFIN  
232 EAST BROAD STREET  
Griffin, Spalding County, Georgia  
NOVA Project Number 10102-3026032

## APPENDIX B

### LABORATORY ANALYTICAL DATA

March 05, 2026

Curtis Moses  
Nova Engineering & Environmental, LLC  
3900 Kennesaw 75 Pkwy, Suite 100  
Kennesaw, GA 30144

**CLIENT PROJECT:** 10102 3026030, 10102 3026030  
**LAB CODE:** 728653-1

Dear Curtis,

Enclosed are asbestos analysis results for PLM Bulk samples received at our laboratory on 02/26/26. The samples were analyzed for asbestos using polarizing light microscopy (PLM) per the EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials and EPA 40 CFR Appendix E to Subpart E of Part 763: Interim Method of the Determination of Asbestos in Bulk Insulation Samples.

Sample results containing >1% asbestos are considered asbestos-containing materials (ACMs) per EPA regulatory requirements. The detection limit for the EPA 600 Method is <1% by calibrated visual estimate.

Thank you for your business and we look forward to continuing good relations.

Kind Regards,



Francina Thadigiri,  
Lab Director

NVLAP 102082-0

**ASBESTOS ANALYTICAL REPORT**  
**By: Polarized Light Microscopy**

Prepared for

**Nova Engineering & Environmental, LLC**

---

|                         |                                                                        |
|-------------------------|------------------------------------------------------------------------|
| CLIENT PROJECT:         | 10102 3026030, 10102 3026030                                           |
| LAB CODE:               | 728653-1                                                               |
| TEST METHOD:            | EPA 600 / R93 / 116 and EPA 40 CFR Appendix E to Subpart E of Part 763 |
| REPORT DATE:            | 03/05/26                                                               |
| TOTAL SAMPLES ANALYZED: | 41                                                                     |
| # SAMPLES >1% ASBESTOS: | 8                                                                      |
| TOTAL LAYERS ANALYZED:  | 54                                                                     |

**Project:** 10102 3026030, 10102 3026030

**Lab Code:** 728653-1

**Method:** EPA 600 / R93 / 116 and EPA 40 CFR Appendix E to Subpart E of Part 763

| Client ID | Lab ID  | Layer   | Sample Description                  | Asbestos %    |
|-----------|---------|---------|-------------------------------------|---------------|
| B-FT-1    | 4171984 | Layer A | Light-green floor tile              | Chrysotile 3% |
|           |         | Layer B | Black mastic                        | Chrysotile 5% |
| B-FT-2    | 4171985 | Layer A | Light-green floor tile              | Chrysotile 3% |
|           |         | Layer B | Black mastic                        | Chrysotile 5% |
| B-FT-3    | 4171986 | Layer A | Green sheet vinyl                   | None Detected |
|           |         | Layer B | Yellow adhesive                     | None Detected |
| B-FT-4    | 4171987 | Layer A | Blue floor tile                     | None Detected |
|           |         | Layer B | Yellow adhesive                     | None Detected |
|           |         | Layer C | Tan leveling compound               | None Detected |
| B-FT-5    | 4171988 | Layer A | Blue floor tile                     | None Detected |
|           |         | Layer B | Yellow adhesive                     | None Detected |
|           |         | Layer C | Tan leveling compound               | None Detected |
| B-FT-6    | 4171989 | Layer A | Gray floor tile                     | None Detected |
|           |         | Layer B | Yellow adhesive                     | None Detected |
| B-FT-7    | 4171990 | Layer A | Gray floor tile                     | None Detected |
|           |         | Layer B | Yellow adhesive                     | None Detected |
| B-JC-8    | 4171991 |         | White joint compound w/ cream paint | None Detected |
| B-JC-9    | 4171992 |         | White joint compound w/ cream paint | None Detected |
| B-JC-10   | 4171993 |         | White joint compound w/ cream paint | None Detected |
| B-W-11    | 4171994 |         | Brown/gray drywall                  | None Detected |
| B-W-12    | 4171995 |         | Brown/gray drywall w/ beige paint   | None Detected |
| B-P-13    | 4171996 |         | Beige plaster w/ gray/brown paint   | None Detected |
| B-P-14    | 4171997 |         | Beige plaster w/ brown paint        | None Detected |
| B-P-15    | 4171998 |         | Gray plaster w/ yellow paint        | None Detected |
| B-CT-16   | 4171999 |         | Beige ceiling tile w/ white paint   | None Detected |

**Project:** 10102 3026030, 10102 3026030

**Lab Code:** 728653-1

**Method:** EPA 600 / R93 / 116 and EPA 40 CFR Appendix E to Subpart E of Part 763

| Client ID | Lab ID  | Layer   | Sample Description                   | Asbestos %     |
|-----------|---------|---------|--------------------------------------|----------------|
| B-CT-17   | 4172000 |         | Beige ceiling tile w/ white paint    | None Detected  |
| B-TSI-18  | 4172001 |         | Gray insulation                      | Chrysotile 30% |
| B-TSI-19  | 4172002 |         | Gray insulation                      | Chrysotile 30% |
| B-TSI-20  | 4172003 |         | Gray insulation                      | Chrysotile 30% |
| B-TSI-21  | 4172004 |         | Gray tape                            | Chrysotile 60% |
| B-TSI-22  | 4172005 | Layer A | Brown woven material                 | None Detected  |
|           |         | Layer B | Gray insulation                      | Chrysotile 50% |
| B-TSI-23  | 4172006 |         | Gray tape                            | Chrysotile 60% |
| B-G-24    | 4172007 |         | Gray glazing w/ white paint          | None Detected  |
| B-G-25    | 4172008 |         | Gray glazing w/ white paint          | None Detected  |
| B-P-26    | 4172009 |         | Tan plaster w/ beige/blue paint      | None Detected  |
| B-P-27    | 4172010 |         | Tan plaster w/ beige/blue paint      | None Detected  |
| B-P-28    | 4172011 |         | White plaster w/ gray paint          | None Detected  |
| B-P-29    | 4172012 |         | Tan plaster w/ beige/blue paint      | None Detected  |
| B-TSI-30  | 4172013 |         | Silver foil w/ yellow adhesive       | None Detected  |
| B-TSI-31  | 4172014 |         | Silver foil w/ yellow adhesive       | None Detected  |
| B-TSI-32  | 4172015 |         | Silver foil w/ yellow adhesive       | None Detected  |
| B-C-33    | 4172016 |         | Beige glazing w/ white/brown paint   | None Detected  |
| B-C-34    | 4172017 | Layer A | Gray caulk w/ white paint            | None Detected  |
|           |         | Layer B | Brown wood                           | None Detected  |
| B-GM-35   | 4172018 |         | Brown granular cementitious material | None Detected  |
| B-GM-36   | 4172019 |         | Brown granular cementitious material | None Detected  |
| B-T-37    | 4172020 |         | White texture w/ white paint         | None Detected  |
| B-T-38    | 4172021 |         | White texture w/ white paint         | None Detected  |
| B-T-39    | 4172022 |         | White texture w/ white paint         | None Detected  |

Project: 10102 3026030, 10102 3026030

Lab Code: 728653-1

Method: EPA 600 / R93 / 116 and EPA 40 CFR Appendix E to Subpart E of Part 763

| Client ID | Lab ID  | Layer   | Sample Description             | Asbestos %    |
|-----------|---------|---------|--------------------------------|---------------|
| B-FS-40   | 4172023 | Layer A | Gray sheet vinyl               | None Detected |
|           |         | Layer B | Beige fibrous backing material | None Detected |
| B-FS-41   | 4172024 | Layer A | Gray sheet vinyl               | None Detected |
|           |         | Layer B | Beige fibrous backing material | None Detected |

# ASBESTOS BULK ANALYSIS

By: Polarized Light Microscopy

**Client:** Nova Engineering & Environmental, LLC  
3900 Kennesaw 75 Pkwy, Suite 100  
Kennesaw, GA 30144

**Lab Code:** 728653-1  
**Date Received:** 02/26/26  
**Date Analyzed:** 03/03/26  
**Date Reported:** 03/05/26

**Project:** 10102 3026030, 10102 3026030

**Method:** ASBESTOS BULK PLM, EPA 600 METHOD

| Client ID     | Lab         | Lab           | NON-ASBESTOS COMPONENTS |             | ASBESTOS             |
|---------------|-------------|---------------|-------------------------|-------------|----------------------|
| Lab ID        | Description | Attributes    | Fibrous                 | Non-Fibrous | %                    |
| <b>B-FT-1</b> | Floor Tile  | Homogeneous   | 45%                     | Gravel      | <b>Chrysotile 3%</b> |
| Layer A       |             | Light-green   | 52%                     | Binder      |                      |
| 4171984       |             | Non-Fibrous   |                         |             |                      |
|               |             | Tightly Bound |                         |             |                      |
| Layer B       | Mastic      | Homogeneous   | 95%                     | Mastic      | <b>Chrysotile 5%</b> |
| 4171984       |             | Black         |                         |             |                      |
|               |             | Non-Fibrous   |                         |             |                      |
|               |             | Tightly Bound |                         |             |                      |
| <b>B-FT-2</b> | Floor Tile  | Homogeneous   | 45%                     | Gravel      | <b>Chrysotile 3%</b> |
| Layer A       |             | Light-green   | 52%                     | Binder      |                      |
| 4171985       |             | Non-Fibrous   |                         |             |                      |
|               |             | Tightly Bound |                         |             |                      |
| Layer B       | Mastic      | Homogeneous   | 95%                     | Mastic      | <b>Chrysotile 5%</b> |
| 4171985       |             | Black         |                         |             |                      |
|               |             | Non-Fibrous   |                         |             |                      |
|               |             | Bound         |                         |             |                      |
| <b>B-FT-3</b> | Sheet Vinyl | Homogeneous   | 100%                    | Vinyl       | <b>None Detected</b> |
| Layer A       |             | Green         |                         |             |                      |
| 4171986       |             | Non-Fibrous   |                         |             |                      |
|               |             | Tightly Bound |                         |             |                      |
| Layer B       | Adhesive    | Homogeneous   | 100%                    | Mastic      | <b>None Detected</b> |
| 4171986       |             | Yellow        |                         |             |                      |
|               |             | Non-Fibrous   |                         |             |                      |
|               |             | Tightly Bound |                         |             |                      |

# ASBESTOS BULK ANALYSIS

By: Polarized Light Microscopy

**Client:** Nova Engineering & Environmental, LLC  
3900 Kennesaw 75 Pkwy, Suite 100  
Kennesaw, GA 30144

**Lab Code:** 728653-1  
**Date Received:** 02/26/26  
**Date Analyzed:** 03/03/26  
**Date Reported:** 03/05/26

**Project:** 10102 3026030, 10102 3026030

**Method:** ASBESTOS BULK PLM, EPA 600 METHOD

| Client ID     | Lab               | Lab                                 | NON-ASBESTOS COMPONENTS |             | ASBESTOS             |
|---------------|-------------------|-------------------------------------|-------------------------|-------------|----------------------|
| Lab ID        | Description       | Attributes                          | Fibrous                 | Non-Fibrous | %                    |
| <b>B-FT-4</b> | Floor Tile        | Homogeneous                         | 45%                     | Gravel      | <b>None Detected</b> |
| Layer A       |                   | Blue                                | 55%                     | Binder      |                      |
| 4171987       |                   | Non-Fibrous<br>Tightly Bound        |                         |             |                      |
| Layer B       | Adhesive          | Homogeneous                         | 100%                    | Mastic      | <b>None Detected</b> |
| 4171987       |                   | Yellow<br>Non-Fibrous<br>Bound      |                         |             |                      |
| Layer C       | Leveling Compound | Homogeneous                         | 100%                    | Binder      | <b>None Detected</b> |
| 4171987       |                   | Tan<br>Non-Fibrous<br>Tightly Bound |                         |             |                      |
| <b>B-FT-5</b> | Floor Tile        | Homogeneous                         | 45%                     | Gravel      | <b>None Detected</b> |
| Layer A       |                   | Blue                                | 55%                     | Binder      |                      |
| 4171988       |                   | Non-Fibrous<br>Tightly Bound        |                         |             |                      |
| Layer B       | Adhesive          | Homogeneous                         | 100%                    | Mastic      | <b>None Detected</b> |
| 4171988       |                   | Yellow<br>Non-Fibrous<br>Bound      |                         |             |                      |
| Layer C       | Leveling Compound | Homogeneous                         | 100%                    | Binder      | <b>None Detected</b> |
| 4171988       |                   | Tan<br>Non-Fibrous<br>Tightly Bound |                         |             |                      |

# ASBESTOS BULK ANALYSIS

By: Polarized Light Microscopy

**Client:** Nova Engineering & Environmental, LLC  
3900 Kennesaw 75 Pkwy, Suite 100  
Kennesaw, GA 30144

**Lab Code:** 728653-1  
**Date Received:** 02/26/26  
**Date Analyzed:** 03/03/26  
**Date Reported:** 03/05/26

**Project:** 10102 3026030, 10102 3026030

**Method:** ASBESTOS BULK PLM, EPA 600 METHOD

| Client ID      | Lab               | Lab           | NON-ASBESTOS COMPONENTS |             | ASBESTOS             |
|----------------|-------------------|---------------|-------------------------|-------------|----------------------|
| Lab ID         | Description       | Attributes    | Fibrous                 | Non-Fibrous | %                    |
| <b>B-FT-6</b>  | Floor Tile        | Homogeneous   | 45%                     | Gravel      | <b>None Detected</b> |
| Layer A        |                   | Gray          | 55%                     | Binder      |                      |
| 4171989        |                   | Non-Fibrous   |                         |             |                      |
|                |                   | Tightly Bound |                         |             |                      |
| Layer B        | Adhesive          | Homogeneous   | 100%                    | Mastic      | <b>None Detected</b> |
| 4171989        |                   | Yellow        |                         |             |                      |
|                |                   | Non-Fibrous   |                         |             |                      |
|                |                   | Bound         |                         |             |                      |
| <b>B-FT-7</b>  | Floor Tile        | Homogeneous   | 45%                     | Gravel      | <b>None Detected</b> |
| Layer A        |                   | Gray          | 55%                     | Binder      |                      |
| 4171990        |                   | Non-Fibrous   |                         |             |                      |
|                |                   | Tightly Bound |                         |             |                      |
| Layer B        | Adhesive          | Homogeneous   | 100%                    | Mastic      | <b>None Detected</b> |
| 4171990        |                   | Yellow        |                         |             |                      |
|                |                   | Non-Fibrous   |                         |             |                      |
|                |                   | Bound         |                         |             |                      |
| <b>B-JC-8</b>  | Joint Compound W/ | Homogeneous   | 1%                      | Mica        | <b>None Detected</b> |
| 4171991        | Cream Paint       | White         | 9%                      | Paint       |                      |
|                |                   | Non-Fibrous   | 90%                     | Binder      |                      |
|                |                   | Bound         |                         |             |                      |
| <b>B-JC-9</b>  | Joint Compound W/ | Homogeneous   | 1%                      | Mica        | <b>None Detected</b> |
| 4171992        | Cream Paint       | White         | 9%                      | Paint       |                      |
|                |                   | Non-Fibrous   | 90%                     | Binder      |                      |
|                |                   | Bound         |                         |             |                      |
| <b>B-JC-10</b> | Joint Compound W/ | Homogeneous   | 1%                      | Mica        | <b>None Detected</b> |
| 4171993        | Cream Paint       | White         | 9%                      | Paint       |                      |
|                |                   | Non-Fibrous   | 90%                     | Binder      |                      |
|                |                   | Bound         |                         |             |                      |

# ASBESTOS BULK ANALYSIS

By: Polarized Light Microscopy

**Client:** Nova Engineering & Environmental, LLC  
3900 Kennesaw 75 Pkwy, Suite 100  
Kennesaw, GA 30144

**Lab Code:** 728653-1  
**Date Received:** 02/26/26  
**Date Analyzed:** 03/03/26  
**Date Reported:** 03/05/26

**Project:** 10102 3026030, 10102 3026030

**Method:** ASBESTOS BULK PLM, EPA 600 METHOD

| Client ID                 | Lab                             | Lab                                                  | NON-ASBESTOS COMPONENTS |                    |                   |                            | ASBESTOS             |
|---------------------------|---------------------------------|------------------------------------------------------|-------------------------|--------------------|-------------------|----------------------------|----------------------|
| Lab ID                    | Description                     | Attributes                                           | Fibrous                 |                    | Non-Fibrous       |                            | %                    |
| <b>B-W-11</b><br>4171994  | Drywall                         | Heterogeneous<br>Brown/gray<br>Non-Fibrous<br>Bound  | 10%                     | Cellulose          | 90%               | Binder                     | <b>None Detected</b> |
| <b>B-W-12</b><br>4171995  | Drywall W/ Beige<br>Paint       | Heterogeneous<br>Brown/gray<br>Fibrous<br>Bound      | 20%                     | Cellulose          | 10%<br>70%        | Paint<br>Binder            | <b>None Detected</b> |
| <b>B-P-13</b><br>4171996  | Plaster W/ Gray/<br>Brown Paint | Homogeneous<br>Beige<br>Non-Fibrous<br>Tightly Bound |                         |                    | 35%<br>10%<br>55% | Gravel<br>Paint<br>Binder  | <b>None Detected</b> |
| <b>B-P-14</b><br>4171997  | Plaster W/ Brown<br>Paint       | Homogeneous<br>Beige<br>Non-Fibrous<br>Tightly Bound |                         |                    | 35%<br>10%<br>55% | Gravel<br>Paint<br>Binder  | <b>None Detected</b> |
| <b>B-P-15</b><br>4171998  | Plaster W/ Yellow<br>Paint      | Homogeneous<br>Gray<br>Non-Fibrous<br>Tightly Bound  |                         |                    | 25%<br>10%<br>65% | Perlite<br>Paint<br>Binder | <b>None Detected</b> |
| <b>B-CT-16</b><br>4171999 | Ceiling Tile W/ White<br>Paint  | Homogeneous<br>Beige<br>Fibrous<br>Loosely Bound     | 35%<br>25%              | Cellulose<br>Glass | 30%<br>10%        | Perlite<br>Paint           | <b>None Detected</b> |
| <b>B-CT-17</b><br>4172000 | Ceiling Tile W/ White<br>Paint  | Homogeneous<br>Beige<br>Fibrous<br>Loosely Bound     | 35%<br>25%              | Cellulose<br>Glass | 30%<br>10%        | Perlite<br>Paint           | <b>None Detected</b> |

# ASBESTOS BULK ANALYSIS

By: Polarized Light Microscopy

**Client:** Nova Engineering & Environmental, LLC  
3900 Kennesaw 75 Pkwy, Suite 100  
Kennesaw, GA 30144

**Lab Code:** 728653-1  
**Date Received:** 02/26/26  
**Date Analyzed:** 03/03/26  
**Date Reported:** 03/05/26

**Project:** 10102 3026030, 10102 3026030

**Method:** ASBESTOS BULK PLM, EPA 600 METHOD

| Client ID                             | Lab            | Lab                                             | NON-ASBESTOS COMPONENTS |             | ASBESTOS              |
|---------------------------------------|----------------|-------------------------------------------------|-------------------------|-------------|-----------------------|
| Lab ID                                | Description    | Attributes                                      | Fibrous                 | Non-Fibrous | %                     |
| <b>B-TSI-18</b><br>4172001            | Insulation     | Homogeneous<br>Gray<br>Fibrous<br>Bound         | 70%                     | Binder      | <b>Chrysotile 30%</b> |
| <b>B-TSI-19</b><br>4172002            | Insulation     | Homogeneous<br>Gray<br>Fibrous<br>Bound         | 70%                     | Binder      | <b>Chrysotile 30%</b> |
| <b>B-TSI-20</b><br>4172003            | Insulation     | Homogeneous<br>Gray<br>Fibrous<br>Bound         | 70%                     | Binder      | <b>Chrysotile 30%</b> |
| <b>B-TSI-21</b><br>4172004            | Tape           | Homogeneous<br>Gray<br>Fibrous<br>Loosely Bound | 40%                     | Binder      | <b>Chrysotile 60%</b> |
| <b>B-TSI-22</b><br>Layer A<br>4172005 | Woven Material | Homogeneous<br>Brown<br>Fibrous<br>Bound        | 100%                    | Cellulose   | <b>None Detected</b>  |
| Layer B<br>4172005                    | Insulation     | Homogeneous<br>Gray<br>Fibrous<br>Loosely Bound | 50%                     | Binder      | <b>Chrysotile 50%</b> |
| <b>B-TSI-23</b><br>4172006            | Tape           | Homogeneous<br>Gray<br>Fibrous<br>Loosely Bound | 40%                     | Binder      | <b>Chrysotile 60%</b> |

# ASBESTOS BULK ANALYSIS

By: Polarized Light Microscopy

**Client:** Nova Engineering & Environmental, LLC  
3900 Kennesaw 75 Pkwy, Suite 100  
Kennesaw, GA 30144

**Lab Code:** 728653-1  
**Date Received:** 02/26/26  
**Date Analyzed:** 03/03/26  
**Date Reported:** 03/05/26

**Project:** 10102 3026030, 10102 3026030

**Method:** ASBESTOS BULK PLM, EPA 600 METHOD

| Client ID                  | Lab                             | Lab                          | NON-ASBESTOS COMPONENTS |             | ASBESTOS             |
|----------------------------|---------------------------------|------------------------------|-------------------------|-------------|----------------------|
| Lab ID                     | Description                     | Attributes                   | Fibrous                 | Non-Fibrous | %                    |
| <b>B-G-24</b><br>4172007   | Glazing W/ White<br>Paint       | Homogeneous                  | 10%                     | Paint       | <b>None Detected</b> |
|                            |                                 | Gray                         | 90%                     | Binder      |                      |
|                            |                                 | Non-Fibrous<br>Bound         |                         |             |                      |
| <b>B-G-25</b><br>4172008   | Glazing W/ White<br>Paint       | Homogeneous                  | 10%                     | Paint       | <b>None Detected</b> |
|                            |                                 | Gray                         | 90%                     | Binder      |                      |
|                            |                                 | Non-Fibrous<br>Bound         |                         |             |                      |
| <b>B-P-26</b><br>4172009   | Plaster W/ Beige/<br>Blue Paint | Homogeneous                  | 35%                     | Gravel      | <b>None Detected</b> |
|                            |                                 | Tan                          | 10%                     | Paint       |                      |
|                            |                                 | Non-Fibrous<br>Tightly Bound | 55%                     | Binder      |                      |
| <b>B-P-27</b><br>4172010   | Plaster W/ Beige/<br>Blue Paint | Homogeneous                  | 35%                     | Gravel      | <b>None Detected</b> |
|                            |                                 | Tan                          | 10%                     | Paint       |                      |
|                            |                                 | Non-Fibrous<br>Tightly Bound | 55%                     | Binder      |                      |
| <b>B-P-28</b><br>4172011   | Plaster W/ Gray<br>Paint        | Homogeneous                  | 30%                     | Gravel      | <b>None Detected</b> |
|                            |                                 | White                        | 10%                     | Paint       |                      |
|                            |                                 | Non-Fibrous<br>Tightly Bound | 60%                     | Binder      |                      |
| <b>B-P-29</b><br>4172012   | Plaster W/ Beige/<br>Blue Paint | Homogeneous                  | 35%                     | Gravel      | <b>None Detected</b> |
|                            |                                 | Tan                          | 10%                     | Paint       |                      |
|                            |                                 | Non-Fibrous<br>Tightly Bound | 55%                     | Binder      |                      |
| <b>B-TSI-30</b><br>4172013 | Foil W/ Yellow<br>Adhesive      | Heterogeneous                | 60%                     | Foil        | <b>None Detected</b> |
|                            |                                 | Silver                       | 40%                     | Mastic      |                      |
|                            |                                 | Non-Fibrous<br>Bound         |                         |             |                      |

# ASBESTOS BULK ANALYSIS

By: Polarized Light Microscopy

**Client:** Nova Engineering & Environmental, LLC  
3900 Kennesaw 75 Pkwy, Suite 100  
Kennesaw, GA 30144

**Lab Code:** 728653-1  
**Date Received:** 02/26/26  
**Date Analyzed:** 03/03/26  
**Date Reported:** 03/05/26

**Project:** 10102 3026030, 10102 3026030

**Method:** ASBESTOS BULK PLM, EPA 600 METHOD

| Client ID                           | Lab                                  | Lab                                              | NON-ASBESTOS COMPONENTS |             | ASBESTOS             |
|-------------------------------------|--------------------------------------|--------------------------------------------------|-------------------------|-------------|----------------------|
| Lab ID                              | Description                          | Attributes                                       | Fibrous                 | Non-Fibrous | %                    |
| <b>B-TSI-31</b><br>4172014          | Foil W/ Yellow<br>Adhesive           | Heterogeneous                                    | 60%                     | Foil        | <b>None Detected</b> |
|                                     |                                      | Silver                                           | 40%                     | Mastic      |                      |
|                                     |                                      | Non-Fibrous<br>Bound                             |                         |             |                      |
| <b>B-TSI-32</b><br>4172015          | Foil W/ Yellow<br>Adhesive           | Heterogeneous                                    | 60%                     | Foil        | <b>None Detected</b> |
|                                     |                                      | Silver                                           | 40%                     | Mastic      |                      |
|                                     |                                      | Non-Fibrous<br>Bound                             |                         |             |                      |
| <b>B-C-33</b><br>4172016            | Glazing W/ White/<br>Brown Paint     | Homogeneous                                      | 10%                     | Paint       | <b>None Detected</b> |
|                                     |                                      | Beige                                            | 90%                     | Binder      |                      |
|                                     |                                      | Non-Fibrous<br>Tightly Bound                     |                         |             |                      |
| <b>B-C-34</b><br>Layer A<br>4172017 | Caulk W/ White<br>Paint              | Homogeneous                                      | 10%                     | Paint       | <b>None Detected</b> |
|                                     |                                      | Gray                                             | 90%                     | Caulk       |                      |
|                                     |                                      | Non-Fibrous<br>Tightly Bound                     |                         |             |                      |
| Layer B<br>4172017                  | Wood                                 | Homogeneous<br>Brown<br>Fibrous<br>Tightly Bound | 100%                    | Cellulose   | <b>None Detected</b> |
| <b>B-GM-35</b><br>4172018           | Granular<br>Cementitious<br>Material | Homogeneous                                      | 30%                     | Gravel      | <b>None Detected</b> |
|                                     |                                      | Brown                                            | 70%                     | Binder      |                      |
|                                     |                                      | Non-Fibrous<br>Bound                             |                         |             |                      |
| <b>B-GM-36</b><br>4172019           | Granular<br>Cementitious<br>Material | Homogeneous                                      | 30%                     | Gravel      | <b>None Detected</b> |
|                                     |                                      | Brown                                            | 70%                     | Binder      |                      |
|                                     |                                      | Non-Fibrous<br>Tightly Bound                     |                         |             |                      |

# ASBESTOS BULK ANALYSIS

By: Polarized Light Microscopy

**Client:** Nova Engineering & Environmental, LLC  
3900 Kennesaw 75 Pkwy, Suite 100  
Kennesaw, GA 30144

**Lab Code:** 728653-1  
**Date Received:** 02/26/26  
**Date Analyzed:** 03/03/26  
**Date Reported:** 03/05/26

**Project:** 10102 3026030, 10102 3026030

**Method:** ASBESTOS BULK PLM, EPA 600 METHOD

| Client ID                            | Lab                         | Lab                                                  | NON-ASBESTOS COMPONENTS |                    |                   |                           | ASBESTOS             |
|--------------------------------------|-----------------------------|------------------------------------------------------|-------------------------|--------------------|-------------------|---------------------------|----------------------|
| Lab ID                               | Description                 | Attributes                                           | Fibrous                 |                    | Non-Fibrous       |                           | %                    |
| <b>B-T-37</b><br>4172020             | Texture W/ White<br>Paint   | Homogeneous<br>White<br>Non-Fibrous<br>Tightly Bound | 5%                      | Glass              | 20%<br>10%<br>65% | Gravel<br>Paint<br>Binder | <b>None Detected</b> |
| <b>B-T-38</b><br>4172021             | Texture W/ White<br>Paint   | Homogeneous<br>White<br>Non-Fibrous<br>Tightly Bound | 5%                      | Glass              | 20%<br>10%<br>65% | Gravel<br>Paint<br>Binder | <b>None Detected</b> |
| <b>B-T-39</b><br>4172022             | Texture W/ White<br>Paint   | Homogeneous<br>White<br>Non-Fibrous<br>Tightly Bound | 5%                      | Glass              | 20%<br>10%<br>65% | Gravel<br>Paint<br>Binder | <b>None Detected</b> |
| <b>B-FS-40</b><br>Layer A<br>4172023 | Sheet Vinyl                 | Homogeneous<br>Gray<br>Non-Fibrous<br>Tightly Bound  |                         |                    | 100%              | Vinyl                     | <b>None Detected</b> |
| Layer B<br>4172023                   | Fibrous Backing<br>Material | Homogeneous<br>Beige<br>Fibrous<br>Bound             | 20%<br>20%              | Cellulose<br>Glass | 60%               | Binder                    | <b>None Detected</b> |
| <b>B-FS-41</b><br>Layer A<br>4172024 | Sheet Vinyl                 | Homogeneous<br>Gray<br>Non-Fibrous<br>Tightly Bound  |                         |                    | 100%              | Vinyl                     | <b>None Detected</b> |
| Layer B<br>4172024                   | Fibrous Backing<br>Material | Homogeneous<br>Beige<br>Fibrous<br>Bound             | 20%<br>20%              | Cellulose<br>Glass | 60%               | Binder                    | <b>None Detected</b> |

**LEGEND:**

Non-Anth = Non-Asbestiform Anthophyllite

Non-Trem = Non-Asbestiform Tremolite

Calc Carb = Calcium Carbonate

**METHOD:** EPA 600 / R93 / 116 and EPA 40 CFR Appendix E to Subpart E of Part 763**REPORTING LIMIT:** 1% by calibrated visual estimation**REGULATORY LIMIT:** 1%

Due to the limitations of the EPA 600 / R93 / 116 method, nonfriable organically bound materials (NOBs) such as vinyl floor tiles can be difficult to analyze via polarized light microscopy (PLM). EPA recommends that all NOBs analyzed by PLM, and found not to contain asbestos, be further analyzed by Transmission Electron Microscopy (TEM). Please note that PLM analysis of dust and soil samples for asbestos is not covered under NVLAP accreditation. Estimated measurement of uncertainty is available on request.

Eurofins Built Environment Testing East, LLC makes no warranty representation regarding the accuracy of client submitted information in preparing and presenting analytical results. Interpretation of the analytical results is the sole responsibility of the client. This report relates only to the samples tested or analyzed and may not be reproduced, except in full, without written approval by Eurofins Built Environment Testing East, LLC. Samples were received in acceptable condition unless otherwise noted. This report may not be used by the client to claim product endorsement by NVLAP or any other agency of the U.S. Government.

Information provided by customer includes customer sample ID and sample description.

Svetlana Arkhipov  
Analyst**DATA QA:**Raeana Allen  
3/5/2026**APPROVED BY:**Francina Thadigiri,  
Lab Director



Built Environment Testing

RES Job #: 728653

| SUBMITTED BY                                              | INVOICE TO                                                | CONTACT INFORMATION                             | SERIES                 |
|-----------------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------|------------------------|
| Company: <b>Nova Engineering &amp; Environmental, LLC</b> | Company: <b>Nova Engineering &amp; Environmental, LLC</b> | Contact: <b>Curtis Moses</b>                    | <b>-1 PLM Standard</b> |
| Address: <b>3900 Kennesaw 75 Pkwy, Suite 100</b>          | Address: <b>3900 Kennesaw 75 Pkwy, Suite 100</b>          | Phone: <b>(770) 425-0777</b>                    |                        |
| <b>Kennesaw, GA 30144</b>                                 | <b>Kennesaw, GA 30144</b>                                 | Fax:                                            |                        |
|                                                           |                                                           | Cell:                                           |                        |
| Project Number and/or P.O. #: <b>10102 3026030</b>        | Project Zip Code:                                         | Final Data Deliverable Email Address:           |                        |
| Project Description/Location: <b>10102 3026030</b>        |                                                           | <b>cmoses@usanova.com (+ 1 ADDNL. CONTACTS)</b> |                        |

| ASBESTOS LABORATORY                                                                                                                                                     |         |          |          |          | REQUESTED ANALYSIS                           |     |     |     |           |        |          | VALID MATRIX CODES |         |      |     |                                         |                         | LAB NOTES                                        |             |  |                 |                            |                         |                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|----------|----------|----------|----------------------------------------------|-----|-----|-----|-----------|--------|----------|--------------------|---------|------|-----|-----------------------------------------|-------------------------|--------------------------------------------------|-------------|--|-----------------|----------------------------|-------------------------|----------------------------------|
| PLM / PCM / TEM / NYS DTL RUSH PRIORITY STANDARD                                                                                                                        |         |          |          |          | PLM - PLM Short Report (EPA/600/R-93/116)    | TEM | PCM | NYS | DUST      | METALS | ORGANICS | VIABLES            | MEDICAL | MOLD | ICO | Air = A                                 |                         | Bulk = B                                         |             |  |                 |                            |                         |                                  |
|                                                                                                                                                                         |         |          |          |          |                                              |     |     |     |           |        |          |                    |         |      |     | Dust = D                                |                         | Food = F                                         |             |  |                 |                            |                         |                                  |
|                                                                                                                                                                         |         |          |          |          |                                              |     |     |     |           |        |          |                    |         |      |     | Paint = P                               |                         | Soil = S                                         |             |  |                 |                            |                         |                                  |
|                                                                                                                                                                         |         |          |          |          |                                              |     |     |     |           |        |          |                    |         |      |     | Surface = SU                            |                         | Swab = SW                                        |             |  |                 |                            |                         |                                  |
|                                                                                                                                                                         |         |          |          |          |                                              |     |     |     |           |        |          |                    |         |      |     | Tape = T                                |                         | Wipe = W                                         |             |  |                 |                            |                         |                                  |
|                                                                                                                                                                         |         |          |          |          |                                              |     |     |     |           |        |          |                    |         |      |     | Drinking Water = DW                     |                         |                                                  |             |  |                 |                            |                         |                                  |
|                                                                                                                                                                         |         |          |          |          |                                              |     |     |     |           |        |          |                    |         |      |     | Waste Water = WW                        |                         |                                                  |             |  |                 |                            |                         |                                  |
|                                                                                                                                                                         |         |          |          |          |                                              |     |     |     |           |        |          |                    |         |      |     | **ASTM E1792 approved wipe media only** |                         |                                                  |             |  |                 |                            |                         |                                  |
|                                                                                                                                                                         |         |          |          |          |                                              |     |     |     |           |        |          |                    |         |      |     | Sample Volume (L) / Area                | Sample Temperature (°C) | Length (or Aliquots) x Width (or Area) (Aliquot) | Matrix Code |  | # of Containers | Date Collected<br>mm/dd/yy | Time Collected<br>hh:mm | Laboratory Analysis Instructions |
|                                                                                                                                                                         |         |          |          |          |                                              |     |     |     |           |        |          |                    |         |      |     |                                         |                         |                                                  |             |  |                 |                            |                         |                                  |
| CHEMISTRY LABORATORY                                                                                                                                                    |         |          |          |          |                                              |     |     |     |           |        |          |                    |         |      |     |                                         |                         |                                                  |             |  |                 |                            |                         |                                  |
| Dust                                                                                                                                                                    |         | RUSH     | PRIORITY | STANDARD |                                              |     |     |     |           |        |          |                    |         |      |     |                                         |                         |                                                  |             |  |                 |                            |                         |                                  |
| Metals                                                                                                                                                                  |         | RUSH     | PRIORITY | STANDARD | *PRIOR NOTICE REQUIRED FOR SAME DAY TAT      |     |     |     |           |        |          |                    |         |      |     |                                         |                         |                                                  |             |  |                 |                            |                         |                                  |
| Organics*                                                                                                                                                               |         | SAME DAY | RUSH     | PRIORITY | STANDARD                                     |     |     |     |           |        |          |                    |         |      |     |                                         |                         |                                                  |             |  |                 |                            |                         |                                  |
| MICROBIOLOGY LABORATORY                                                                                                                                                 |         |          |          |          |                                              |     |     |     |           |        |          |                    |         |      |     |                                         |                         |                                                  |             |  |                 |                            |                         |                                  |
| Viable Analysis**                                                                                                                                                       |         | PRIORITY | STANDARD |          |                                              |     |     |     |           |        |          |                    |         |      |     |                                         |                         |                                                  |             |  |                 |                            |                         |                                  |
|                                                                                                                                                                         |         |          |          |          | **TAT DEPENDENT ON SPEED OF MICROBIAL GROWTH |     |     |     |           |        |          |                    |         |      |     |                                         |                         |                                                  |             |  |                 |                            |                         |                                  |
| Medical Device Analysis                                                                                                                                                 |         | RUSH     | STANDARD |          |                                              |     |     |     |           |        |          |                    |         |      |     |                                         |                         |                                                  |             |  |                 |                            |                         |                                  |
| Mold Analysis                                                                                                                                                           |         | RUSH     | PRIORITY | STANDARD |                                              |     |     |     |           |        |          |                    |         |      |     |                                         |                         |                                                  |             |  |                 |                            |                         |                                  |
| **Turnaround times establish a laboratory priority, subject to laboratory volume and are not guaranteed. Additional fees apply for afterhours, weekends and holidays.** |         |          |          |          |                                              |     |     |     |           |        |          |                    |         |      |     |                                         |                         |                                                  |             |  |                 |                            |                         |                                  |
| Special Instructions:                                                                                                                                                   |         |          |          |          |                                              |     |     |     |           |        |          |                    |         |      |     |                                         |                         |                                                  |             |  |                 |                            |                         |                                  |
| Client Sample ID Number (Sample ID's must be unique)                                                                                                                    |         |          |          |          | ASBESTOS                                     |     |     |     | CHEMISTRY |        |          |                    |         |      |     |                                         |                         |                                                  |             |  |                 |                            |                         |                                  |
| 1                                                                                                                                                                       | B-FT-1  |          |          |          | X                                            |     |     |     |           |        |          |                    |         |      |     |                                         |                         | B                                                |             |  |                 |                            |                         |                                  |
| 2                                                                                                                                                                       | B-FT-2  |          |          |          | X                                            |     |     |     |           |        |          |                    |         |      |     |                                         |                         | B                                                |             |  |                 |                            |                         |                                  |
| 3                                                                                                                                                                       | B-FT-3  |          |          |          | X                                            |     |     |     |           |        |          |                    |         |      |     |                                         |                         | B                                                |             |  |                 |                            |                         |                                  |
| 4                                                                                                                                                                       | B-FT-4  |          |          |          | X                                            |     |     |     |           |        |          |                    |         |      |     |                                         |                         | B                                                |             |  |                 |                            |                         |                                  |
| 5                                                                                                                                                                       | B-FT-5  |          |          |          | X                                            |     |     |     |           |        |          |                    |         |      |     |                                         |                         | B                                                |             |  |                 |                            |                         |                                  |
| 6                                                                                                                                                                       | B-FT-6  |          |          |          | X                                            |     |     |     |           |        |          |                    |         |      |     |                                         |                         | B                                                |             |  |                 |                            |                         |                                  |
| 7                                                                                                                                                                       | B-FT-7  |          |          |          | X                                            |     |     |     |           |        |          |                    |         |      |     |                                         |                         | B                                                |             |  |                 |                            |                         |                                  |
| 8                                                                                                                                                                       | B-JC-8  |          |          |          | X                                            |     |     |     |           |        |          |                    |         |      |     |                                         |                         | B                                                |             |  |                 |                            |                         |                                  |
| 9                                                                                                                                                                       | B-JC-9  |          |          |          | X                                            |     |     |     |           |        |          |                    |         |      |     |                                         |                         | B                                                |             |  |                 |                            |                         |                                  |
| 10                                                                                                                                                                      | B-JC-10 |          |          |          | X                                            |     |     |     |           |        |          |                    |         |      |     |                                         |                         | B                                                |             |  |                 |                            |                         |                                  |
| 11                                                                                                                                                                      | B-W-11  |          |          |          | X                                            |     |     |     |           |        |          |                    |         |      |     |                                         |                         | B                                                |             |  |                 |                            |                         |                                  |
| 12                                                                                                                                                                      | B-W-12  |          |          |          | X                                            |     |     |     |           |        |          |                    |         |      |     |                                         |                         | B                                                |             |  |                 |                            |                         |                                  |
| 13                                                                                                                                                                      | B-P-13  |          |          |          | X                                            |     |     |     |           |        |          |                    |         |      |     |                                         |                         | B                                                |             |  |                 |                            |                         |                                  |

Eurofins Built Environment Testing East, LLC establishes a unique Lab Sample ID, for each sample, by preceding each unique Client Sample ID with the laboratory RES Job Number.

Eurofins Built Environment Testing East, LLC will analyze incoming samples based on information received and will not be responsible for errors or omissions in calculations resulting from the inaccuracy of original data. By signing, client/company representative agrees that submission of the following samples for requested analysis as indicated on this Chain of Custody shall constitute an analytical services agreement with payment terms of NET60. Failure to comply with payment terms may result in a 18% APR finance charge.

|                                                                                                  |                                |                                     |
|--------------------------------------------------------------------------------------------------|--------------------------------|-------------------------------------|
| Relinquished By:                                                                                 | Date/Time: 02/26/2026 14:38:25 | Sample Condition: <b>Acceptable</b> |
| Received By:  | Atria Warren                   | Date/Time: 02/26/2026 14:38:25      |
|                                                                                                  |                                | Carrier: <b>Hand</b>                |



Built Environment Testing

RES Job #: **728653**

Submitted By: **Nova Engineering & Environmental, LLC**

| Client Sample ID Number<br>(Sample ID's must be unique) | REQUESTED ANALYSIS                        |     |     |     |      |        |          |         |         |      | VALID MATRIX CODES                      |           |             |                 |                            |                         | LAB NOTES                           |
|---------------------------------------------------------|-------------------------------------------|-----|-----|-----|------|--------|----------|---------|---------|------|-----------------------------------------|-----------|-------------|-----------------|----------------------------|-------------------------|-------------------------------------|
|                                                         | PLM - PLM Short Report (EPA/600/R-93/116) | TEM | PCM | NYS | DUST | METALS | ORGANICS | VIABLES | MEDICAL | MOLD | Air = A                                 | Bulk = B  | Matrix Code | # of Containers | Date Collected<br>mm/dd/yy | Time Collected<br>hh:mm | Laboratory Analysis<br>Instructions |
|                                                         |                                           |     |     |     |      |        |          |         |         |      | Dust = D                                | Food = F  |             |                 |                            |                         |                                     |
|                                                         |                                           |     |     |     |      |        |          |         |         |      | Paint = P                               | Soil = S  |             |                 |                            |                         |                                     |
|                                                         |                                           |     |     |     |      |        |          |         |         |      | Surface = SU                            | Swab = SW |             |                 |                            |                         |                                     |
|                                                         |                                           |     |     |     |      |        |          |         |         |      | Tape = T                                | Wipe = W  |             |                 |                            |                         |                                     |
|                                                         |                                           |     |     |     |      |        |          |         |         |      | Drinking Water = DW                     |           |             |                 |                            |                         |                                     |
|                                                         |                                           |     |     |     |      |        |          |         |         |      | Waste Water = WW                        |           |             |                 |                            |                         |                                     |
|                                                         |                                           |     |     |     |      |        |          |         |         |      | **ASTM E1792 approved wipe media only** |           |             |                 |                            |                         |                                     |
| 14 B-P-14                                               | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 15 B-P-15                                               | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 16 B-CT-16                                              | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 17 B-CT-17                                              | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 18 B-TSI-18                                             | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 19 B-TSI-19                                             | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 20 B-TSI-20                                             | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 21 B-TSI-21                                             | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 22 B-TSI-22                                             | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 23 B-TSI-23                                             | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 24 B-G-24                                               | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 25 B-G-25                                               | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 26 B-P-26                                               | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 27 B-P-27                                               | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 28 B-P-28                                               | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 29 B-P-29                                               | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 30 B-TSI-30                                             | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 31 B-TSI-31                                             | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 32 B-TSI-32                                             | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 33 B-C-33                                               | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 34 B-C-34                                               | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 35 B-GM-35                                              | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 36 B-GM-36                                              | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 37 B-T-37                                               | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 38 B-T-38                                               | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 39 B-T-39                                               | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 40 B-FS-40                                              | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |
| 41 B-FS-41                                              | X                                         |     |     |     |      |        |          |         |         |      |                                         |           | B           |                 |                            |                         |                                     |

**Nova Engineering & Environmental, LLC**  
**Sample Locations**

**RES #:** 728653  
**Project Number and/or P.O. #:** 10102 3026030  
**Project Description/Location:** 10102 3026030

| Client Sample ID | Sample Location                    |
|------------------|------------------------------------|
| B-FT-1           | 9x9 Green- Jail Entry              |
| B-FT-2           | 9x9 Green- Jail Side rm            |
| B-FT-3           | 9x9 Green- Jail Hall               |
| B-FT-4           | 12x12 Blue w/ Leveler/ Glue        |
| B-FT-5           | 12x12 Blue w/ Leveler/ Glue        |
| B-FT-6           | Tan 12x12 w/ Glue- Foyer           |
| B-FT-7           | Tan 12x12 w/ Glue- Foyer           |
| B-JC-8           | Joint Compound- Foyer              |
| B-JC-9           | Joint Compound- Foyer              |
| B-JC-10          | Joint Compound- Foyer              |
| B-W-11           | Wallboard- Foyer                   |
| B-W-12           | Wallboard- Foyer                   |
| B-P-13           | Plaster- Jail Entry                |
| B-P-14           | Plaster- Main                      |
| B-P-15           | Plaster- holding cell              |
| B-CT-16          | 2x2 Ceiling Tile- Entry rm         |
| B-CT-17          | 2x2 Ceiling Tile- Entry rm hallway |
| B-TSI-18         | TSI Elbow- Basement                |
| B-TSI-19         | TSI Elbow- Basement                |
| B-TSI-20         | TSI Elbow- Basement                |
| B-TSI-21         | TSI Run- Basement                  |
| B-TSI-22         | TSI Run- Basement                  |
| B-TSI-23         | TSI Run- Basement                  |
| B-G-24           | Glazing- Front Window              |
| B-G-25           | Glazing- Side Window               |
| B-P-26           | Plaster- Ceiling                   |

**Nova Engineering & Environmental, LLC**  
**Sample Locations**

**RES #:** 728653  
**Project Number and/or P.O. #:** 10102 3026030  
**Project Description/Location:** 10102 3026030

|          |                             |
|----------|-----------------------------|
| B-P-27   | Plaster- A wall             |
| B-P-28   | Plaster- B wall             |
| B-P-29   | Plaster- C wall             |
| B-TSI-30 | Duct Insulation- Hall       |
| B-TSI-31 | Duct Insulation- Hall       |
| B-TSI-32 | Duct Insulation- Hall       |
| B-C-33   | Caulking-Frame- door entry  |
| B-C-34   | Caulking-Frame- Wi side     |
| B-GM-35  | Grout/ mortar               |
| B-GM-36  | Grout/ mortar               |
| B-T-37   | Ceiling Texture- Rear Patio |
| B-T-38   | Ceiling Texture- Rear Patio |
| B-T-39   | Ceiling Texture- Rear Patio |
| B-FS-40  | Blue Floor Sheeting RR      |

East: (866) 871-1984

Central: (800) 651-4802

West: (833) 465-5857

| CONTACT INFORMATION |                  |                                |
|---------------------|------------------|--------------------------------|
| Company:            | NOVA Engineering | Address: 3900 Kennesaw 75 Plwy |
| Contact:            | Curtis Moses     | Special Instructions:          |
| Phone:              | (7) 425-0777     |                                |

| PROJECT INFORMATION  |               | TURN AROUND TIME CODES - (TAT) |                                                                                                                                                                                           |                           |
|----------------------|---------------|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Project ID:          | 10102-3026030 | STD - Standard (Default)       | Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs. Rush availability is Matrix Dependent. |                           |
| Project Description: | 10102-3026030 | ND - Next Business Day         |                                                                                                                                                                                           |                           |
| Project State:       | GA            | SD - Same Business Day         |                                                                                                                                                                                           |                           |
| Project Zip Code:    |               | Sampling Date/Time:            | Various                                                                                                                                                                                   | WH - Weekend/Holiday/ASAP |
| PO Number:           | N/A           | Sampled By:                    | CM                                                                                                                                                                                        |                           |

| SAMPLE ID | DESCRIPTION                | Sample Type (Below) | TAT (Above) | Total Volume (L) /Area (ft2) (as applicable) | NOTES (Flow Rate, Start/End Times, Sampling Time (min) etc.) |
|-----------|----------------------------|---------------------|-------------|----------------------------------------------|--------------------------------------------------------------|
| B-F1-1    | 8x8 Green - Jail Entry     | B                   | STD         |                                              | U/mastic                                                     |
| B-F1-2    | ↓                          |                     |             |                                              | ↓                                                            |
| B-F1-3    | ↓                          |                     |             |                                              | ↓                                                            |
| B-F1-4    | 12x12 Blue w/ leather/shoe |                     |             |                                              | End                                                          |
| B-F1-5    | ↓                          |                     |             |                                              | RR                                                           |
| B-F1-6    | TLN 12x12 w/ Glue-Foyer    |                     |             |                                              |                                                              |
| B-F1-7    | ↓                          |                     |             |                                              |                                                              |
| B-F1-8    | Joint Compound-Foyer       |                     |             |                                              |                                                              |
| B-F1-9    | ↓                          |                     |             |                                              |                                                              |
| B-F1-10   | ↓                          |                     |             |                                              |                                                              |
| B-W-11    | Wallboard - Foyer          |                     |             |                                              |                                                              |
| B-W-12    | ↓                          |                     |             |                                              |                                                              |
| B-P-13    | Plaster - Jail Entry       |                     |             |                                              |                                                              |
| B-P-14    | ↓ - main                   |                     |             |                                              |                                                              |
| B-P-15    | ↓ - holding Cell           |                     |             |                                              |                                                              |

| SAMPLE TYPE CODES |           | RELINQUISHED BY                                                                     | DATE & TIME | RECEIVED BY                                                                           | DATE & TIME        |
|-------------------|-----------|-------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------|--------------------|
| A - Air           | W - Wipe  |  | 1350        |  | 2/26/26<br>1:47 pm |
| B - Bulk          | T - Tape  |                                                                                     |             |                                                                                       |                    |
| D - Dust          | R - Rock  |                                                                                     |             |                                                                                       |                    |
| SO - Soil         | O - Other |                                                                                     |             |                                                                                       |                    |

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at <https://www.eurofinsus.com/environment-testing/built-environment/resources/sampling-guides-cocs-and-forms/>

©COPYRIGHT 2025 EUROFINS BUILT ENVIRONMENT TESTING, LLC

Doc. # EBET-CR-FRM86918, Rev. 1, Revised 12/1/2025, Page 1 of 1

## ASBESTOS ANALYSIS

## REQUESTED SERVICES

| PCM                                                     | PLM | TEM |
|---------------------------------------------------------|-----|-----|
| Air - Fiber Count (NIOSH 7400)                          |     |     |
| Air - OSHA with TWA                                     |     |     |
| Bulk - EPA 600/R-93/116                                 |     |     |
| Bulk - EPA Point Count                                  |     |     |
| Bulk - Gravimetric Pt. Ct.                              |     |     |
| Soil/Rock - CARB 435                                    |     |     |
| Air - EPA AHERA                                         |     |     |
| Air - NIOSH 7402                                        |     |     |
| Air (PCM) - ISO 10312                                   |     |     |
| Soil - ASTM D7521 (PLM with TEM Follow-Up)              |     |     |
| Bulk - Chatfield/ EPA 600/R-93/116 Sec. 2.5.5.1         |     |     |
| Dust / Wipe - ASTM D6480                                |     |     |
| Dust Microvac                                           |     |     |
| Vermiculite - USEPA 600 R04-004                         |     |     |
| Spray on Fireproofing with Vermiculite - ELAP 198.8     |     |     |
| Water - EPA 100.2                                       |     |     |
| Bulk / Dust / Wipe / Soil - Qualitative In-House Method |     |     |
| NYS - ELAP 198.1                                        |     |     |
| Other                                                   |     |     |

**East: (866) 871-1984**

**Central: (800) 651-4802**

**West: (833) 465-5857**

| CONTACT INFORMATION |                       |
|---------------------|-----------------------|
| Company:            | See Page 1            |
| Contact:            | Address:              |
| Phone:              | Special Instructions: |

| PROJECT INFORMATION  |               |    |  | TURN AROUND TIME CODES - (TAT) |                                                                                                                                                                                       |
|----------------------|---------------|----|--|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Project ID:          | 10102-3026030 |    |  | STD - Standard (Default)       | Rushes received after 2pm on weekdays, will be considered received the next business day. Please alert us in advance of weekend analysis needs. Rush availability is Matrix Dependent |
| Project Description: |               |    |  | ND - Next Business Day         |                                                                                                                                                                                       |
| Project State:       | Sampling      |    |  | SD - Same Business Day         |                                                                                                                                                                                       |
| Project Zip Code:    | Date/Time:    |    |  | WH - Weekend/Holiday/ASAP      |                                                                                                                                                                                       |
| PO Number:           | Sampled By:   | Cm |  |                                |                                                                                                                                                                                       |

| SAMPLE ID | DESCRIPTION                    | Sample Type (Below) | TAT (Above) | Total Volume (L) / Area (ft <sup>2</sup> ) (as applicable) | NOTES (Flow Rate, Start/End Times, Sampling Time (min) etc.) |
|-----------|--------------------------------|---------------------|-------------|------------------------------------------------------------|--------------------------------------------------------------|
| B-CT-16   | 2 X 2 Ceiling Tile - Entry rm. |                     |             |                                                            |                                                              |
| B-CT-17   | ↓ hallway                      |                     |             |                                                            |                                                              |
| B-TS3-18  | TSI - Elbow - basement         |                     |             |                                                            |                                                              |
| B-TS3-19  | ↓                              |                     |             |                                                            |                                                              |
| B-TS3-20  |                                |                     |             |                                                            |                                                              |
| B-TS3-21  | TS3 - Run - basement           |                     |             |                                                            |                                                              |
| B-TS3-22  | ↓                              |                     |             |                                                            |                                                              |
| B-TS3-23  |                                |                     |             |                                                            |                                                              |
| B-G-24    | Glazing - Front Window         |                     |             |                                                            |                                                              |
| B-G-25    | ↓ - Side Window                |                     |             |                                                            |                                                              |
| B-P-26    | Plaster - Ceiling              |                     |             |                                                            |                                                              |
| B-P-27    | ↓ - A wall                     |                     |             |                                                            |                                                              |
| B-P-28    |                                |                     |             |                                                            |                                                              |
| B-P-29    | ↓ B wall                       |                     |             |                                                            |                                                              |
| B-P-30    | ↓ C wall                       |                     |             |                                                            |                                                              |
| B-TS3-30  | Duct Insulation - hall         |                     |             |                                                            |                                                              |

| SAMPLE TYPE CODES |           |  |  |
|-------------------|-----------|--|--|
| A - Air           | W - Wipe  |  |  |
| B - Bulk          | T - Tape  |  |  |
| D - Dust          | R - Rock  |  |  |
| SO - Soil         | O - Other |  |  |

|                                                                                     |      |
|-------------------------------------------------------------------------------------|------|
| RELINQUISHED BY                                                                     |      |
|  | 1350 |

|             |         |
|-------------|---------|
| DATE & TIME | 2/26/20 |
|-------------|---------|

|  |             |
|--|-------------|
|  | RECEIVED BY |
|  | <i>AW</i>   |

|                   |
|-------------------|
| DATE & TIME       |
| 2/26/20<br>1:47pm |

| ASBESTOS ANALYSIS                                       |  |             |             |       |  |  |  |  |  |
|---------------------------------------------------------|--|-------------|-------------|-------|--|--|--|--|--|
| REQUESTED SERVICES                                      |  |             |             |       |  |  |  |  |  |
| PCM                                                     |  | PLM         |             | TEM   |  |  |  |  |  |
| Air - Fiber Count (NIOSH 7400)                          |  |             |             |       |  |  |  |  |  |
| Air - OSHA with TWA                                     |  |             |             |       |  |  |  |  |  |
| Bulk - EPA 600/R-93/116                                 |  | Pl. Ct. 400 | 1000        |       |  |  |  |  |  |
| Bulk - EPA Point Count                                  |  | Pl. Ct. 400 | 1000        |       |  |  |  |  |  |
| Bulk - Gravimetric Pt. Ct.                              |  | Pl. Ct. 400 | 1000        |       |  |  |  |  |  |
| Soil/Rock - CARB 435                                    |  | Pl. Ct. 400 | 1000        |       |  |  |  |  |  |
| Air - EPA AHERA                                         |  |             |             |       |  |  |  |  |  |
| Air - NIOSH 7402                                        |  |             |             |       |  |  |  |  |  |
| Air (PCME) - ISO 10312                                  |  |             |             |       |  |  |  |  |  |
| Soil - ASTM D7521 (PLM with TEM Follow-Up)              |  |             |             |       |  |  |  |  |  |
| Bulk - Chatfield/ EPA 600/R-93/116 Sec. 2.5.5.1         |  |             |             |       |  |  |  |  |  |
| Dust / Wipe - ASTM D6480                                |  |             |             |       |  |  |  |  |  |
| Dust Microvac                                           |  | ASTM D5755  | ASTM D5756  |       |  |  |  |  |  |
| Vermiculite - USEPA 600 R04-004                         |  |             |             |       |  |  |  |  |  |
| Spray on Fireproofing with Vermiculite - ELAP 198.8     |  |             |             |       |  |  |  |  |  |
| Water - EPA 100.2                                       |  | Potable     | Non-Potable |       |  |  |  |  |  |
| Bulk / Dust / Wipe / Soil - Qualitative In-House Method |  |             |             |       |  |  |  |  |  |
| NYS - ELAP                                              |  | 198.1       | 198.4       | 198.6 |  |  |  |  |  |
| Other                                                   |  |             |             |       |  |  |  |  |  |

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at <https://www.eurofinsus.com/environment-testing/built-environment/resources/sampling-guides-cocs-and-forms/>

©COPYRIGHT 2025 EUROFINS BUILT ENVIRONMENT TESTING, LLC

Doc. # EBET-CR-FRM86918, Rev. 1, Revised 12/1/2025, Page 1 of 1

East: (866) 871-1984

Central: (800) 651-4802

West: (833) 465-5857

| CONTACT INFORMATION   |            |
|-----------------------|------------|
| Company:              | See Page 1 |
| Contact:              |            |
| Phone:                |            |
| Address:              |            |
| Special Instructions: |            |

| PROJECT INFORMATION  |               | TURN AROUND TIME CODES - (TAT)                            |                                                                                                                                                                                           |
|----------------------|---------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Project ID:          | 10102-3026030 | <input checked="" type="radio"/> STD - Standard (Default) | Rushes received after 2pm or on weekends, will be considered received the next business day. Please alert us in advance of weekend analysis needs. Rush availability is Matrix Dependent. |
| Project Description: |               | ND - Next Business Day                                    |                                                                                                                                                                                           |
| Project State:       |               | SD - Same Business Day                                    |                                                                                                                                                                                           |
| Project Zip Code:    |               | WH - Weekend/Holiday/ASAP                                 |                                                                                                                                                                                           |
| PO Number:           |               | Sampled By:                                               | CM                                                                                                                                                                                        |

| SAMPLE ID | DESCRIPTION                | Sample Type (Below) | TAT (Above) | Total Volume (L) /Area (ft2) (as applicable) | NOTES (Flow Rate, Start/End Times, Sampling Time (min) etc.) |
|-----------|----------------------------|---------------------|-------------|----------------------------------------------|--------------------------------------------------------------|
| B-753-31  |                            |                     | B STD       |                                              |                                                              |
| B-753-32  |                            |                     |             |                                              |                                                              |
| B-C-33    | Calking - Frame-door Entry |                     |             |                                              |                                                              |
| B-C-34    | - W. Side                  |                     |             |                                              |                                                              |
| B-GM-35   | Grout/mortar -             |                     |             |                                              |                                                              |
| B-GM-36   |                            |                     |             |                                              |                                                              |
| B-T-37    | Ceiling Texture-Rear Patio |                     |             |                                              |                                                              |
| B-T-38    |                            |                     |             |                                              |                                                              |
| B-T-39    |                            |                     |             |                                              |                                                              |
| B-FS-40   | Blue Floor Sheeting R.R.   |                     |             |                                              |                                                              |
| B-FS-41   |                            |                     |             |                                              |                                                              |

| SAMPLE TYPE CODES                         |           | RELINQUISHED BY                                                                     | DATE & TIME | RECEIVED BY                                                                           | DATE & TIME       |
|-------------------------------------------|-----------|-------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------|-------------------|
| A - Air                                   | W - Wipe  |  | 1350        |  | 2/26/26<br>1:47pm |
| <input checked="" type="radio"/> B - Bulk | T - Tape  |                                                                                     |             |                                                                                       |                   |
| D - Dust                                  | R - Rock  |                                                                                     |             |                                                                                       |                   |
| SO - Soil                                 | O - Other |                                                                                     |             |                                                                                       |                   |

| ASBESTOS ANALYSIS              |                     |                            |             |             |                  |                         |                                            |                                                 |                          |                            |                                 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|--------------------------------|---------------------|----------------------------|-------------|-------------|------------------|-------------------------|--------------------------------------------|-------------------------------------------------|--------------------------|----------------------------|---------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| REQUESTED SERVICES             |                     |                            |             |             |                  |                         |                                            |                                                 |                          |                            |                                 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
| PCM                            |                     | PLM                        |             |             | TEM              |                         |                                            |                                                 |                          |                            |                                 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
| Air - Fiber Count (NIOSH 7400) | Air - OSHA with TWA | Bulk - EPA 600/R-93/116    | Pl. Cl. 400 | Pl. Cl. 400 | Air - NIOSH 7402 | Air (PCM/E) - ISO 10312 | Soil - ASTM D7521 (PLM with TEM Follow-Up) | Bulk - Chatfield/ EPA 600/R-93/116 Sec. 2.5.5.1 | Dust / Wipe - ASTM D6480 | Dust Microvac - ASTM D5755 | Vermiculite - USEPA 600 R04-004 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                     | Bulk - EPA Point Count     | Pl. Cl. 400 | Pl. Cl. 400 |                  |                         |                                            |                                                 |                          |                            |                                 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                     | Bulk - Gravimetric Pl. Cl. | Pl. Cl. 400 | Pl. Cl. 400 |                  |                         |                                            |                                                 |                          |                            |                                 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                     | Soil/Rock - CARB 435       |             |             |                  |                         |                                            |                                                 |                          |                            |                                 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                     | Air - EPA AHERA            |             |             |                  |                         |                                            |                                                 |                          |                            |                                 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
| Other                          | Other               | Other                      | Other       | Other       | Other            | Other                   | Other                                      | Other                                           | Other                    | Other                      |                                 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                     |                            |             |             |                  |                         |                                            |                                                 |                          |                            | Other                           | Other | Other | Other | Other | Other | Other | Other | Other |       |       |       |       |       |       |       |       |       |       |       |       |
|                                |                     |                            |             |             |                  |                         |                                            |                                                 |                          |                            |                                 |       |       |       |       |       |       |       |       | Other | Other | Other | Other | Other | Other | Other |       |       |       |       |       |
|                                |                     |                            |             |             |                  |                         |                                            |                                                 |                          |                            |                                 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       | Other | Other | Other | Other | Other |
|                                |                     |                            |             |             |                  |                         |                                            |                                                 |                          |                            |                                 |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |

By submitting this Chain of Custody, you agree to be bound by the terms and conditions set forth at <https://www.eurofinsus.com/environment-testing/built-environment/resources/sampling-guides-cocs-and-forms/>

©COPYRIGHT 2025 EUROFINS BUILT ENVIRONMENT TESTING, LLC

Doc. # EBET-CR-FRM86918, Rev. 1, Revised 12/1/2025, Page 1 of 1

| No. | Time            | Units      | Component   | Substrate | Side | Condition | Color  | Results  | PbC   | Error |
|-----|-----------------|------------|-------------|-----------|------|-----------|--------|----------|-------|-------|
| 1   | 2/26/2026 9:26  | cps        |             |           |      |           |        |          | 0.59  | 0     |
| 2   | 2/26/2026 9:30  | mg / cm ^2 | calibration |           |      |           |        | positive | 1.1   | 0.1   |
| 3   | 2/26/2026 9:34  | mg / cm ^2 | calibration |           |      |           |        | positive | 1.1   | 0.1   |
| 4   | 2/26/2026 9:38  | mg / cm ^2 | calibration |           |      |           |        | positive | 1.1   | 0.1   |
| 5   | 2/26/2026 10:08 | mg / cm ^2 | wall        | brick     | D    | poor      | red    | negative | < LOD | 0.03  |
| 6   | 2/26/2026 10:09 | mg / cm ^2 | wall        | brick     | D    | poor      | red    | negative | < LOD | 0.03  |
| 7   | 2/26/2026 10:09 | mg / cm ^2 | window      | wood      | D    | poor      | white  | negative | < LOD | 0.03  |
| 8   | 2/26/2026 10:10 | mg / cm ^2 | window      | wood      | D    | poor      | white  | negative | < LOD | 0.03  |
| 9   | 2/26/2026 10:10 | mg / cm ^2 | window      | wood      | D    | poor      | white  | negative | < LOD | 0.03  |
| 10  | 2/26/2026 10:11 | mg / cm ^2 | window      | wood      | C    | poor      | white  | positive | 19.35 | 8     |
| 11  | 2/26/2026 10:12 | mg / cm ^2 | window      | wood      | C    | poor      | white  | negative | < LOD | 0.03  |
| 12  | 2/26/2026 10:12 | mg / cm ^2 | window      | wood      | C    | poor      | white  | negative | < LOD | 0.03  |
| 13  | 2/26/2026 10:12 | mg / cm ^2 | window      | wood      | C    | poor      | white  | negative | < LOD | 0.03  |
| 14  | 2/26/2026 10:13 | mg / cm ^2 | door        | metal     | C    | poor      | white  | negative | < LOD | 0.03  |
| 15  | 2/26/2026 10:13 | mg / cm ^2 | door        | metal     | C    | poor      | white  | negative | < LOD | 0.03  |
| 16  | 2/26/2026 10:14 | mg / cm ^2 | floor       | concrete  | C    | poor      | gray   | negative | < LOD | 0.03  |
| 17  | 2/26/2026 10:16 | mg / cm ^2 | wall        | brick     | C    | poor      | red    | negative | < LOD | 0.03  |
| 18  | 2/26/2026 10:17 | mg / cm ^2 | post        | metal     | C    | poor      | yellow | negative | < LOD | 0.03  |
| 19  | 2/26/2026 10:18 | mg / cm ^2 | post        | metal     | C    | poor      | yellow | negative | < LOD | 0.03  |
| 20  | 2/26/2026 10:19 | mg / cm ^2 | window      | wood      | B    | poor      | white  | negative | < LOD | 0.03  |
| 21  | 2/26/2026 10:19 | mg / cm ^2 | window      | wood      | B    | poor      | white  | negative | < LOD | 0.03  |
| 22  | 2/26/2026 10:19 | mg / cm ^2 | window      | wood      | B    | poor      | white  | negative | < LOD | 0.03  |
| 23  | 2/26/2026 10:19 | mg / cm ^2 | door        | metal     | B    | poor      | white  | positive | 1.95  | 1     |
| 24  | 2/26/2026 10:20 | mg / cm ^2 | door        | metal     | B    | poor      | white  | negative | 0.15  | 0.03  |
| 25  | 2/26/2026 10:22 | mg / cm ^2 | window      | wood      | B    | poor      | white  | negative | 0.21  | 0.5   |
| 26  | 2/26/2026 10:22 | mg / cm ^2 | window      | wood      | B    | poor      | white  | negative | < LOD | 0.03  |
| 27  | 2/26/2026 10:23 | mg / cm ^2 | window      | wood      | B    | poor      | white  | negative | 0.6   | 0.1   |
| 28  | 2/26/2026 10:23 | mg / cm ^2 | window      | wood      | A    | poor      | white  | positive | 23.1  | 10.1  |
| 29  | 2/26/2026 10:23 | mg / cm ^2 | window      | wood      | A    | poor      | white  | negative | 0.49  | 0.2   |
| 30  | 2/26/2026 10:23 | mg / cm ^2 | window      | wood      | A    | poor      | white  | negative | < LOD | 0.03  |
| 31  | 2/26/2026 10:23 | mg / cm ^2 | window      | wood      | A    | poor      | white  | positive | 1.04  | 0.1   |
| 32  | 2/26/2026 10:24 | mg / cm ^2 | window      | wood      | A    | poor      | white  | negative | 0.24  | 0.03  |
| 33  | 2/26/2026 10:24 | mg / cm ^2 | window      | wood      | A    | poor      | white  | negative | 0.52  | 0.03  |
| 34  | 2/26/2026 10:24 | mg / cm ^2 | window      | wood      | A    | poor      | white  | positive | 8.25  | 1.2   |
| 35  | 2/26/2026 10:24 | mg / cm ^2 | door        | wood      | A    | poor      | white  | negative | < LOD | 0.03  |
| 36  | 2/26/2026 10:24 | mg / cm ^2 | door        | wood      | A    | poor      | white  | negative | < LOD | 0.03  |
| 37  | 2/26/2026 10:28 | mg / cm ^2 | wall        | plaster   | A    | gray      | white  | positive | 17.25 | 10    |
| 38  | 2/26/2026 10:29 | mg / cm ^2 | wall        | plaster   | A    | gray      | white  | positive | 8.7   | 4     |
| 39  | 2/26/2026 10:29 | mg / cm ^2 | window      | metal     | A    | gray      | white  | negative | 0.39  | 0.03  |
| 40  | 2/26/2026 10:30 | mg / cm ^2 | window      | metal     | A    | gray      | white  | positive | 4.5   | 1.2   |
| 41  | 2/26/2026 10:30 | mg / cm ^2 | door        | metal     | B    | gray      | gray   | positive | 30.15 | 10    |
| 42  | 2/26/2026 10:30 | mg / cm ^2 | door        | metal     | B    | gray      | gray   | positive | 4.05  | 4.05  |

| No. | Time            | Units      | Component | Substrate | Side | Condition | Color  | Results  | PbC   | Error |
|-----|-----------------|------------|-----------|-----------|------|-----------|--------|----------|-------|-------|
| 43  | 2/26/2026 10:31 | mg / cm ^2 | wall      | plaster   | B    | poor      | gray   | positive | 1.05  | 1.05  |
| 44  | 2/26/2026 10:31 | mg / cm ^2 | wall      | plaster   | B    | poor      | gray   | negative | 0.91  | 0.3   |
| 45  | 2/26/2026 10:31 | mg / cm ^2 | wall      | plaster   | B    | poor      | gray   | positive | 5.25  | 1.2   |
| 46  | 2/26/2026 10:32 | mg / cm ^2 | window    | metal     | B    | poor      | white  | positive | 22.5  | 10    |
| 47  | 2/26/2026 10:32 | mg / cm ^2 | window    | wood      | B    | poor      | yellow | positive | 24.75 | 12    |
| 48  | 2/26/2026 10:33 | mg / cm ^2 | floor     | metal     | B    | poor      | gray   | positive | 3.15  | 1.2   |
| 49  | 2/26/2026 10:34 | mg / cm ^2 | wall      | plaster   | C    | poor      | gray   | positive | 1.57  | 0.4   |
| 50  | 2/26/2026 10:34 | mg / cm ^2 | wall      | plaster   | C    | poor      | gray   | positive | 2.7   | 1.1   |
| 51  | 2/26/2026 10:34 | mg / cm ^2 | wall      | plaster   | C    | poor      | gray   | negative | <LOD  | 0.03  |
| 52  | 2/26/2026 10:34 | mg / cm ^2 | wall      | plaster   | C    | poor      | gray   | positive | 8.85  | 3.4   |
| 53  | 2/26/2026 10:35 | mg / cm ^2 | window    | metal     | C    | poor      | yellow | positive | 9     | 2     |
| 54  | 2/26/2026 10:35 | mg / cm ^2 | radiator  | metal     | C    | poor      | yellow | positive | 6.75  | 3     |
| 55  | 2/26/2026 10:35 | mg / cm ^2 | wall      | plaster   | D    | poor      | gray   | positive | 10.2  | 4.3   |
| 56  | 2/26/2026 10:36 | mg / cm ^2 | wall      | plaster   | D    | poor      | gray   | negative | < LOD | 0.03  |
| 57  | 2/26/2026 10:36 | mg / cm ^2 | wall      | plaster   | D    | poor      | gray   | negative | 0.36  | 0.1   |
| 58  | 2/26/2026 10:36 | mg / cm ^2 | door      | metal     | D    | poor      | gray   | positive | 28.2  | 12    |
| 59  | 2/26/2026 10:36 | mg / cm ^2 | door      | metal     | D    | poor      | gray   | positive | 9     | 2.2   |
| 60  | 2/26/2026 10:37 | mg / cm ^2 | floor     | concrete  | D    | poor      | gray   | negative | < LOD | 0.03  |
| 61  | 2/26/2026 10:38 | mg / cm ^2 | floor     | concrete  | D    | poor      | gray   | negative | < LOD | 0.03  |
| 62  | 2/26/2026 10:38 | mg / cm ^2 | floor     | concrete  | D    | poor      | gray   | positive | 1.8   | 0.5   |
| 63  | 2/26/2026 10:38 | mg / cm ^2 | riser     | metal     | A    | poor      | brown  | negative | < LOD | 0.03  |
| 64  | 2/26/2026 10:39 | mg / cm ^2 | riser     | metal     | C    | poor      | brown  | negative | < LOD | 0.03  |
| 65  | 2/26/2026 10:40 | mg / cm ^2 | cells     | metal     | C    | poor      | gray   | positive | 30.6  | 12.4  |
| 66  | 2/26/2026 10:40 | mg / cm ^2 | pipe      | metal     | C    | poor      | gray   | positive | 41.1  | 6     |
| 67  | 2/26/2026 10:40 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 64.8  | 10    |
| 68  | 2/26/2026 10:40 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 8.4   | 2     |
| 69  | 2/26/2026 10:41 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 25.2  | 11.2  |
| 70  | 2/26/2026 10:41 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 26.7  | 14.6  |
| 71  | 2/26/2026 10:41 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 5.25  | 1.22  |
| 72  | 2/26/2026 10:42 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 9.15  | 2.43  |
| 73  | 2/26/2026 10:42 | mg / cm ^2 | cell      | metal     | A    | poor      | gray   | positive | 46.95 | 4.56  |
| 74  | 2/26/2026 10:43 | mg / cm ^2 | ceiling   | plaster   | A    | poor      | white  | positive | 22.95 | 6.22  |
| 75  | 2/26/2026 10:45 | mg / cm ^2 | stairs    | metal     | A    | poor      | black  | positive | 56.7  | 12    |
| 76  | 2/26/2026 10:45 | mg / cm ^2 | wall      | plaster   | A    | poor      | yellow | negative | 0.12  | 0.03  |
| 77  | 2/26/2026 10:45 | mg / cm ^2 | wall      | plaster   | A    | poor      | yellow | negative | < LOD | 0.03  |
| 78  | 2/26/2026 10:46 | mg / cm ^2 | pipe      | metal     | A    | poor      | gray   | positive | 1.07  | 0.04  |
| 79  | 2/26/2026 10:46 | mg / cm ^2 | pipe      | metal     | A    | poor      | gray   | negative | 0.35  | 0.03  |
| 80  | 2/26/2026 10:47 | mg / cm ^2 | wall      | plaster   | B    | poor      | black  | positive | 8     | 5.2   |
| 81  | 2/26/2026 10:47 | mg / cm ^2 | wall      | plaster   | C    | poor      | black  | positive | 3.15  | 1.1   |
| 82  | 2/26/2026 10:47 | mg / cm ^2 | tread     | metal     | C    | poor      | black  | positive | 3.15  | 1.1   |
| 83  | 2/26/2026 10:48 | mg / cm ^2 | floor     | metal     | C    | poor      | black  | negative | 0.21  | 0.03  |
| 84  | 2/26/2026 10:49 | mg / cm ^2 | door      | metal     | C    | poor      | white  | negative | 0.33  | 0.03  |
| 85  | 2/26/2026 10:49 | mg / cm ^2 | door      | metal     | D    | poor      | white  | positive | 1.2   | 0.2   |
| 86  | 2/26/2026 10:51 | mg / cm ^2 | wall      | plaster   | D    | poor      | white  | positive | 1.2   | 0.2   |

| No. | Time            | Units      | Component   | Substrate | Side | Condition | Color | Results  | PbC   | Error |
|-----|-----------------|------------|-------------|-----------|------|-----------|-------|----------|-------|-------|
| 87  | 2/26/2026 10:52 | mg / cm ^2 | wall        | plaster   | D    | poor      | white | negative | < LOD | 0.03  |
| 88  | 2/26/2026 10:53 | mg / cm ^2 | wall        | plaster   | D    | poor      | green | positive | 1.65  | 0.55  |
| 89  | 2/26/2026 10:54 | mg / cm ^2 | wall        | plaster   | D    | poor      | green | positive | 3.9   | 1.2   |
| 90  | 2/26/2026 10:54 | mg / cm ^2 | trim        | plaster   | D    | poor      | green | positive | 3.15  | 1.2   |
| 91  | 2/26/2026 10:55 | mg / cm ^2 | wall        | plaster   | D    | poor      | green | positive | 8.25  | 3.2   |
| 92  | 2/26/2026 10:56 | mg / cm ^2 | wall        | plaster   | D    | poor      | green | negative | 0.64  | 0.1   |
| 93  | 2/26/2026 10:57 | mg / cm ^2 | wall        | plaster   | D    | poor      | green | positive | 5.85  | 2.4   |
| 94  | 2/26/2026 10:57 | mg / cm ^2 | wall        | plaster   | D    | poor      | green | positive | 8.4   | 5.3   |
| 95  | 2/26/2026 10:57 | mg / cm ^2 | wall        | plaster   | D    | poor      | green | positive | 34.5  | 8.2   |
| 96  | 2/26/2026 10:57 | mg / cm ^2 | wall        | plaster   | D    | poor      | green | positive | 32.85 | 8     |
| 97  | 2/26/2026 10:58 | mg / cm ^2 | window      | wood      | D    | poor      | white | negative | 0.75  | 0.1   |
| 98  | 2/26/2026 10:58 | mg / cm ^2 | window      | wood      | D    | poor      | white | positive | 2.85  | 1.1   |
| 99  | 2/26/2026 10:58 | mg / cm ^2 | window      | wood      | D    | poor      | white | negative | < LOD | 0.03  |
| 100 | 2/26/2026 10:58 | mg / cm ^2 | window      | wood      | D    | poor      | white | positive | 1.2   | 0.3   |
| 101 | 2/26/2026 10:59 | mg / cm ^2 | window      | wood      | A    | poor      | white | positive | 3.3   | 1.1   |
| 102 | 2/26/2026 10:59 | mg / cm ^2 | door        | wood      | D    | poor      | white | negative | < LOD | 0.03  |
| 103 | 2/26/2026 10:59 | mg / cm ^2 | door        | wood      | D    | poor      | white | negative | < LOD | 0.03  |
| 104 | 2/26/2026 10:59 | mg / cm ^2 | door        | wood      | B    | poor      | white | negative | < LOD | 0.03  |
| 105 | 2/26/2026 11:00 | mg / cm ^2 | door        | wood      | B    | poor      | white | negative | < LOD | 0.03  |
| 106 | 2/26/2026 11:00 | mg / cm ^2 | window      | wood      | B    | poor      | white | positive | 2.7   | 1.2   |
| 107 | 2/26/2026 11:00 | mg / cm ^2 | window      | wood      | B    | poor      | white | positive | 7.05  | 3.5   |
| 108 | 2/26/2026 11:09 | mg / cm ^2 | door        | wood      | A    | poor      | white | negative | < LOD | 0.03  |
| 109 | 2/26/2026 11:09 | mg / cm ^2 | door        | wood      | A    | poor      | white | negative | < LOD | 0.03  |
| 110 | 2/26/2026 11:09 | mg / cm ^2 | wall        | window    | B    | poor      | white | negative | < LOD | 0.03  |
| 111 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | B    | poor      | green | positive | 8.4   | 2.8   |
| 112 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | B    | poor      | green | positive | 11.85 | 4.3   |
| 113 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | B    | poor      | green | positive | 44.25 | 12.5  |
| 114 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | B    | poor      | green | positive | 16.5  | 8.8   |
| 115 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | B    | poor      | green | positive | 42.9  | 13.4  |
| 116 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | B    | poor      | green | positive | 15.3  | 4.4   |
| 117 | 2/26/2026 11:10 | mg / cm ^2 | wall        | plaster   | A    | poor      | green | positive | 49.8  | 16.4  |
| 118 | 2/26/2026 11:11 | mg / cm ^2 | window      | wood      | A    | poor      | white | positive | 3.9   | 1.8   |
| 119 | 2/26/2026 11:11 | mg / cm ^2 | window      | wood      | A    | poor      | white | negative | 0.12  | 0.03  |
| 120 | 2/26/2026 11:11 | mg / cm ^2 | window      | wood      | A    | poor      | white | negative | 0.19  | 0.03  |
| 121 | 2/26/2026 11:11 | mg / cm ^2 | window      | wood      | B    | poor      | white | negative | 0.1   | 0.03  |
| 122 | 2/26/2026 11:11 | mg / cm ^2 | door        | wood      | A    | poor      | white | positive | 3.75  | 1.3   |
| 123 | 2/26/2026 11:12 | mg / cm ^2 | door        | wood      | A    | poor      | white | positive | 6     | 2.2   |
| 124 | 2/26/2026 11:23 | mg / cm ^2 | calibration |           |      |           |       | negative | 1.1   | 0.1   |
| 125 | 2/26/2026 11:23 | mg / cm ^2 | calibration |           |      |           |       | negative | 1.1   | 0.1   |
| 126 | 2/26/2026 11:23 | mg / cm ^2 | calibration |           |      |           |       | negative | 1.1   | 0.1   |

< LOD = below level of detection

## APPENDIX C

### PERSONNEL QUALIFICATIONS



## NICKOLAUS DASANTOS

### Environmental Business Unit Manager

#### PROFESSIONAL EXPERIENCE

Mr. DaSantos began his career in 2003 is a Manager with NOVA's Environmental Group in Kennesaw, Georgia. Mr. DaSantos has experience as an environmental consultant performing all aspects of Phase I and Phase II Environmental Site Assessments (ESAs), Risk Hazard Assessments (RHAs), National Environmental Policy Act (NEPA) Assessments, Georgia Environmental Policy Act (GEPA) Assessments, Prospective Purchaser Corrective Action Plans (PPCAPs), Hazardous Site Response Act (HSRA) Notifications, Brownfield Applications, Compliance Status Reports (CSRs), Oversight for the assessment, excavation, removal and remediation of Underground Storage Tanks (USTs), and the installation of soil borings/groundwater monitoring wells, surface and groundwater sampling, soil sampling, multi-incremental soil sampling, stockpile soil sampling, Toxicity Characteristic Leaching Procedure (TCLP) sampling, Mold Assessments, Radon Assessments, Radon Mitigation Design, Radon Mitigation Installation Oversight, biocell construction/remediation, and Vapor Intrusion Assessments, Vapor Intrusion Mitigation (VIMS) Design, Vapor Intrusion Mitigation System Installation Oversight.

Mr. DaSantos is experienced in performing pre-renovation/pre-demolition asbestos inspections, lead based paint inspections, mold inspections, as well as large asbestos, lead based paint, and hazardous materials abatement oversight projects.

Mr. DaSantos is also experienced in assessment and remediation of hazardous waste sites impacted by chlorinated solvents, petroleum hydrocarbons, and other chemical substances released into the environment. Mr. DaSantos has knowledge of state and federal environmental programs and government regulations, including RCRA, HSRA, CERCLA, UST/LUST, AHERA, ASHARA, and OSHA.

#### Education:

BS, Natural Science, with emphasis in Geology, University of Alaska at Anchorage 2011

BA, Philosophy, University of Georgia 2000

Certificate of Environmental Ethics, University of Georgia, 2000

#### REPRESENTATIVE PROJECT EXPERIENCE

##### Utilities

Georgia Pacific Center Renovations, Atlanta, GA

##### Water/Wastewater

Roswell Groundwater Well Treatment, Roswell, GA

Riverside Drive WTP-Chemical Bldg, Gainesville, GA

##### Aviation

McCollum Airport Control Tower, Marietta, GA

Charlie Brown Airport Site, Atlanta, GA

Taxiway Extension-LaFayette Airport, LaFayette, GA

AJR| Existing FBO Building Site, Cornelia, GA

##### Transportation

DOT-74A Welcome Ctr - South (Lake Park), Lake Park, Georgia

GDOT MMIP 400 Exp Lanes PI#0001757, Kennesaw, Georgia

SR57@Kaolin Pipe Line 1.8 MI S of Gordon, Gordon, Georgia

GDOT I-285 Express Lanes PI #0001758, Kennesaw, Georgia

GDOT Muscogee SR85/ US27 PI0013926, Columbus, Georgia

GDOT I-285 @ I-20 W Interch PI #0013918, Various, Georgia

Delta Museum, Atlanta, Georgia

Henry County Roadway, McDonough, Georgia

US 280/SR 300 from E of Lake Blackshear, Cordele, Georgia



### **Certifications / Registrations:**

U.S. EPA Lead Inspector  
Certification No. 2006

Certified Niton XRF Operator  
ASHERA (Asbestos) Building  
Inspector/Asbestos in Buildings:  
Management Plan  
(Management Planner)  
Certificate No. 20589

Asbestos Abatement Designer  
Certificate No. 4320

Control of Respirable Crystalline  
Silica Dust

40-hour HAZWOPER Training

NC Asbestos Accreditation  
Inspector/Mgmt. Planner  
Certificate No. 122569

US 80 Bull River Bridge/Lazeratto  
Bridge, Tybee Island, Georgia

US 41 and US 411 Interchange,  
Cartersville, Georgia

SR10 from Ft. Gordon ACP/Gate 6  
to SR223, na, Georgia

Cobb Noonday Creek Trail  
Extension, Woodstock, Georgia

US27/SR1 Widening Turnberry Ln to  
SR315, na, Georgia

Cobb Rottenwood Creek Trail, Phase  
1, Marietta, Georgia

Atlanta Airport Travel Center Site,  
Atlanta, Georgia

Old Atlanta Road Improvements,  
Suwanee, Georgia

Andrew Jackson Highway Tract  
LBP/ACM Sur, Charlotte, North  
Carolina

Barnwell Rd at SR140 / Holcomb  
Bridge Rd, Johns Creek, Georgia

Bartow County Cass-White Road  
Phase II (, Cartersville, Georgia

SR141/N Druid Hills to Ashford  
Dunwoody, Brookhaven, Georgia

GDOT GEC MMIP SR 400 Express  
Lanes, v, Georgia

GDOT GEC MMIP I-285/I-20 East  
Interchange, Atlanta, Georgia

GDOT GEC MMIP I-285/I-20 E.  
Interchange, Kennesaw, Georgia

Cedarcrest Rd-Harmony Grove  
Church Rd, Dallas, Georgia

GDOT SR15 Sparta ByPass,  
Kennesaw, Georgia

SR 211 Widening, Braselton,  
Georgia

GDOT SR120 Abbotts Bridge Rd  
PI#721000, Kennesaw, Georgia

SR100 @ Clarks Creek  
PI#0013821, Kennesaw, Georgia

GDOT SR201 @ Tanyard Creek PI  
#0013816, Kennesaw, Georgia

GDOT SR156 @ Salacoa Creek NW  
of Ranger, Ranger, Georgia

Design Services for the McDonough  
Pkwy a, McDonough, Georgia

Multi-Use Path - State Rt. 3/US Hwy  
41, Atlanta, Georgia

Columbus Georgia Railroad Yard,  
Columbus, Georgia

CR742/Bass Road P.I. # 0014896,  
Kennesaw, Georgia

GDOT Clarke County SR 10 Loop PI  
0013715, Bogart, Georgia

Barrow County SR 82 PI 0013819,  
Bogart, Georgia

GDOT Muscogee SR22 Spur  
PI0014170, Columbus, Georgia

GDOT SR376 @Alapahoochee River  
PI0014073, Statenville, Georgia

GDOT SR37 @Ochlockonee River  
PI0014901, Moultrie, Georgia

GDOT SR3 CONN @ CR392 Upper  
Riverdale Rd, Riverdale, Georgia

GDOT I-985 @CS991/Elachee Road  
PI No. 0013922, Gainesville,  
Georgia

Buford Springs Connector  
Roundabout, Atlanta, Georgia

SR-81 at SR-162, Covington,  
Georgia

GDOT SR 1/SR 20/US 27 @ Etowah  
River & N, Rome, Georgia

Pacolet Milliken Diversion Pond  
Dredging, Drayton, South Carolina

### **Education**

LBP Operation & Maint. Plan (O&M  
Plan), Newnan, GA

Phase I ESA - 80 Jackson St.,  
Newnan, GA

4219 Etowah Drive SE, Acworth, GA  
Cy Grant Gymnasium, Clarksville, GA

Agnes Scott College - Rebekah Hall,  
Decatur, GA

Georgia Gwinnett College-C3  
Academy, Lawrenceville, GA

Pettit 095 Building, Atlanta, GA

|                                                            |                                                            |
|------------------------------------------------------------|------------------------------------------------------------|
| UWG Substation Relocation,<br>Carrollton, GA               | KSU Abatement Oversight,<br>Kennesaw, GA                   |
| J-269 UWG Biology Building #58<br>Site, Carrollton, GA     | KSU English Building-Floor<br>Tile/Mastic A, Kennesaw, GA  |
| Oglethorpe University - Goslin Hall ,<br>Atlanta, GA       | KSU English Building-Floor<br>Tile/Mastic A, Kennesaw, GA  |
| J-296 Academic Learning Center,<br>Kennesaw, GA            | KSU Howell Residence Hall Floor<br>Tile Aba, Marietta, GA  |
| Albany Residence Halls 3 & 4,<br>#200A/200B, Albany, GA    | J-235 Crosland Tower, Tunnel &<br>Connector, Atlanta, GA   |
| Albany Residence Halls 5 & 6,<br>Freshman Dorm, Albany, GA | GSU - Chilled Water Utility<br>Relocation, Atlanta, GA     |
| Albany South & East Residence<br>Halls, Albany, GA         | Dalton State College-Sequoia Hall<br>Renova Dalton Georgia |
| Darton Commons, Albany, GA                                 | KSU English Building-Floor<br>Tile/Mastic A, Kennesaw, GA  |
| Darton Village South, Albany, GA                           | GTRI Cobb South Campus Site,<br>Marietta, GA               |
| Gordon Village Albany Georgia                              | Morehouse School of Medicine –<br>Mixed Use, Atlanta, GA   |
| Gordon Commons, Albany, GA                                 | Rockefeller Hall, Atlanta, GA                              |
| Anderson Hall – Cochran, Albany,<br>GA                     | MGSU Macon New Residence Hall<br>Site, Macon, GA           |
| Gateway Hall A&B – Cochran,<br>Albany, GA                  | Wellstar Clinic, 3215 Campus Loop<br>Road, Kennesaw, GA    |
| Harris Hall - Cochran, Albany, GA                          | J-330 - University of West Georgia,<br>Carrollton, GA      |
| Regents Hall - Cochran, Albany, GA                         | KSU Center, 3333 Busbee Drive<br>NW, Kennesaw, GA          |
| Warrior Hall - Cochran, Albany, GA                         | GSU Window Restoration<br>Monitoring, Atlanta, GA          |
| Aviation Hall - Eastman, Albany, GA                        | KSU Marietta Campus English<br>Building, Marietta, GA      |
| Talmadge Hall - Cochran, Albany, GA                        | Oglethorpe University-Goodman Hall<br>Renov, Atlanta, GA   |
| Browning Hall - Cochran, Albany, GA                        | Kennesaw State University-Student<br>Center, Kennesaw, GA  |
| College Station - Macon, Albany, GA                        | KSU-New Housing Site(Kennesaw<br>Campus) , Kennesaw, GA    |
| KSU, Marietta, GA                                          | Mike Cottrell College of Business<br>UNG BO, Dahlonega, GA |
| KSU Library Building - Phase 2,<br>Kennesaw, GA            | Howell Hall, KSU - Marietta Campus,<br>Marietta, GA        |
| KSU Courtyard "A", Kennesaw, GA                            | Dalton State College Bandy Gym<br>Student R, Dalton, GA    |
| KSU Commons "B", Kennesaw, GA                              |                                                            |
| KSU Housing "C", Kennesaw, GA                              |                                                            |
| KSU Howell "D", Kennesaw, GA                               |                                                            |
| KSU Hornett Village "E", Kennesaw,<br>GA                   |                                                            |
| KSU Dining Hall "E", Kennesaw, GA                          |                                                            |
| KSU Special Interest F.1,<br>Kennesaw, GA                  |                                                            |
| KSU Community Center F.2,<br>Kennesaw, GA                  |                                                            |

|                                                               |                                                          |
|---------------------------------------------------------------|----------------------------------------------------------|
| Gwinnett Technical College Building<br>100, Lawrenceville, GA | Clairemont Elementary School,<br>Decatur, GA             |
| TCSG-236 Lanier Technical College,<br>GA                      | Clayton Co Information Technology<br>Bldg, Atlanta, GA   |
| TCSG-334 North Georgia Technical<br>College, Clarkesville, GA | King Springs Elementary School,<br>Smyrna, GA            |
| North Greenville University<br>Wetlands, Tigerville, SC       | Jonesboro High School Jonesboro<br>Georgia               |
| UNCC Student Counseling Center,<br>Charlotte, NC              | Winnona Park Elementary School,<br>Decatur, GA           |
| UNCC - Colvard 2000, Charlotte, NC                            | East Point Auditorium Site, East<br>Point, GA            |
| Dug Gap Elementary School Site,<br>Dalton, GA                 | Laurens County Schools, East<br>Dublin, GA               |
| Fulton Science Academy Site,<br>Alpharetta, GA                | Goshen Valley Boys Ranch Addition,<br>Waleska, GA        |
| Valley Point Middle School<br>Fieldhouse, Dalton, GA          | Oconee County Elementary School,<br>Watkinsville, GA     |
| Jordan Hall, Atlanta, GA                                      | Decatur City Schools AHERA,<br>Decatur, GA               |
| Renfroe Middle School, Decatur, GA                            | Ficquett Elementary School,<br>Covington, GA             |
| 30.38 Acre Ada Street Site, Blue<br>Ridge, GA                 | Atlanta Public Schools AHERA 3<br>Year, Atlanta, GA      |
| Pine Log Elementary School - 500<br>Block, Rydal, GA          | Renfroe Middle School, Decatur, GA                       |
| KIPP South Fulton Academy, East<br>Point, GA                  | Former Blalock Elementary, Atlanta,<br>GA                |
| Renfroe Middle School Renovations,<br>Decatur, GA             | Jacobs Ladder School Expansion,<br>Atlanta, GA           |
| Decatur High School, Decatur, GA                              | City Schools of Decatur, Decatur, GA                     |
| ECLC Modular Classroom Site,<br>Decatur, GA                   | Renfroe Middle School-Limited<br>Indoor Air, Decatur, GA |
| Cherokee County Ball Ground Site,<br>Canton, GA               | Ficquett Elementary School,<br>Newton, GA                |
| Antioch Elementary School, Dalton,<br>GA                      | 240 Barber Road, Marietta, GA                            |
| Riverwood High School Site, Sandy<br>Springs, GA              | Upper Mill Creek High School,<br>Buford, GA              |
| Cartersville Primary School,<br>Cartersville, GA              | Chattahoochee High School, Johns<br>Creek, GA            |
| Decatur High School Renovations,<br>Decatur, GA               | Creekside High School, Fairburn, GA                      |
| KIPP Vision Primary School, Atlanta,<br>GA                    | Northview High School, Johns<br>Creek, GA                |
| College Heights Early Childhood<br>Learning, Decatur, GA      | Decatur High School, Decatur, GA                         |

St. Jude Catholic School, Atlanta,  
GA

Winnona Park Elementary School,  
Decatur, GA

Beaverdam Elementary School,  
Elberton, GA

Forest Park Middle School, Forest  
Park, GA

Morningside Elementary School,  
Atlanta, GA

New Canton High School, Canton,  
GA

Booker T Washington High School,  
Atlanta, GA

Atlanta Public Schools Legionella  
Sampling, Atlanta, GA

APS Legionella Sampling Retesting,  
Atlanta, GA

APS-Legionella Sampling Testing,  
Atlanta, GA

APS Legionella 2nd Event Re-  
Sampling, Atlanta, GA

APS-Limited Fungir Air Assessment,  
Atlanta, GA

City Schools of Decatur Legionella  
Sampling, Decatur, GA

Kipp South Fulton Academy,  
Atlanta, GA

City School of Decatur Limited  
Drinking, Decatur, GA

Existing Gymnasium – KIPP Soul  
Campus, Atlanta, GA

Anson Co. Schools AHERA 3 Yr Re-  
Insp, Wadesboro, NC

Anson County Proposed Middle  
School Site, Wadesboro, NC

---

# *The Environmental Institute*

---

---

## *Nickolaus DaSantos*

---

Social Security Number - XXX-XX-6996

NOVA Engineering - 3900 Kennesaw Parkway, Suite 100, Kennesaw, GA 30144

*Has completed 8 hours of coursework and satisfactorily  
passed an examination that meets all criteria required for  
EPA/AHERA/ASHARA (TSCA Title II) Approved Reaccreditation*

### *Asbestos in Buildings: Inspector & Management Planner Refresher*

*August 12, 2025*

Course Date

*20589*

Certificate Number

*August 12, 2025*

Examination Date

*August 12, 2026*

Expiration Date



Beverly B. Campbell - Course Director/Training Manager

(Approved by the ABIH Certification Maintenance Committee for 1 CM point - Approval #11-583)  
Florida Accreditation #0002805; Tennessee Accreditation #A-TP-IR-148-139089 and A-TP-MPR-148-139091  
Alabama Accreditation # SS-2210-ASBTPR-01

TEI - 9755 Dogwood Road, Suite 350, Roswell, GA 30075  
Phone: 770-427-3600 - Website: [www.tei-atl.com](http://www.tei-atl.com)

---

# ***The Environmental Institute***

---

## ***Nick DaSantos***

Social Security Number - XXX-XX-6996

Nova Engineering - 3900 Kennesaw 75 Parkway, Suite 100, Kennesaw, GA 30144

*Has completed 8 hours of coursework and satisfactorily passed the hands-on skills assessment and an examination that meets training criteria in accordance with requirements for Lead-Based Paint Activities in Target Housing and Child-Occupied Facilities as regulated by Georgia DNR/EPD Chapter 391-3-24 and U. S. EPA TSCA 40 CFR Part 745 for the refresher course titled*

### ***Lead Inspector Refresher***

***January 29, 2026***

Course Date

***January 29, 2026***

Examination Date

***January 29, 2028***

Georgia Expiration Date

***January 29, 2029***

EPA Expiration Date

  
Beverly Campbell - Principal Instructor/Training Manager

***2251***

Certificate Number



(Approved by the ABIH Certification Maintenance Committee for 1 CM point - Approval #11-584)  
(State of Georgia Accredited - Certification No. 20-0799-006SR - September 21, 1999)

Alabama Accreditation #20-021022-33826

TEI - 9755 Dogwood Road, Suite 350, Roswell, GA 30075  
Phone: 770-427-3600 - Website: [www.tei-atl.com](http://www.tei-atl.com)



## CURTIS MOSES

### Staff Professional

#### PROFESSIONAL EXPERIENCE

Mr. Moses is a Staff Professional with NOVA's Environmental Group. Mr. Moses has experience as an environmental professional providing various aspects of environmental consultation. His experience includes performing pre-renovation/pre-demolition asbestos inspections, lead based paint inspections, lead risk assessments, indoor air quality studies, microbial assessments, Phase I Site Assessments as well as large-scale asbestos and lead abatement oversight. He has worked in this industry since 2006.

#### Certifications /Registrations:

NIOSH 582, Certificate No. 2260  
AHERA (Asbestos) Building Inspector, Certificate No. 20466  
South Carolina (Asbestos) No. BI-00805  
North Carolina (Asbestos) No. 12831  
Alabama (Asbestos) No. AIN0516610139  
West Virginia (Asbestos) No. AI008032  
U.S. EPA Lead Risk Assessor Certificate No. 1849  
GA EPD Lead Risk Assessor Certificate No. 70RA00715  
U.S. EPA Lead Inspector, Certificate No. 2076  
North Carolina Lead Risk Assessor No. 120265

#### REPRESENTATIVE PROJECT EXPERIENCE

##### Airport

Taxiway Extension-LaFayette Airport, LaFayette, GA  
AJR| Existing FBO Building Site, Cornelia, GA

##### Education

Read Hall Renovations & Additions, GA  
J-273 Atlanta Metropolitan State College, Atlanta, GA  
GA Tech Baseball Stadium Renovation, Atlanta, GA  
GT Chandler Stadium Bldg Envelope, Atlanta, GA  
NGTC Aquaponics/ Hydroponics Lab, Clarkesville, GA  
Atlanta's John Marshall Law School Parki, Atlanta, GA  
KSU English Building Asbestos Survey, GA  
KSU Library Building, GA  
Proposed Edgewood Ave. Student Housing, GA  
Gwinnett Tech. College Student Affairs, GA  
LBP Operation & Maint. Plan (O&M Plan), Newnan, GA  
Phase I ESA - 80 Jackson St., Newnan, GA  
Cy Grant Gymnasium, Clarksville, GA  
Agnes Scott College - Rebekah Hall, Decatur, GA  
Norton Hall - Kennesaw State University, Marietta, GA

Pettit 095 Building, Atlanta, GA  
Kennesaw State University - Marietta Cam, Marietta, GA  
KSU Library Building - Phase 2, Kennesaw, GA  
J-269 UWG Biology Building #58 Site, Carrollton, GA  
Oglethorpe University - Goslin Hall Ren., Atlanta, GA  
New Housing - Macon, Macon, GA  
KSU Abatement Oversight, Kennesaw, GA  
Talmadge Hall - Cochran, Albany, GA  
Browning Hall - Cochran, Albany, GA  
KSU English Building-Floor Tile/Mastic A, Kennesaw, GA  
Dalton State College-Sequoia Hall Renova, Dalton, GA  
KSU - Marietta Campus - Building B Mecha, Marietta, GA  
GTRI Cobb South Campus Site, Marietta, GA  
Morehouse School of Medicine - Mixed Use, Atlanta, GA  
KSU Howell Residence Hall Floor Tile Aba, Marietta, GA  
Rockefeller Hall, Atlanta, GA  
Wellstar Clinic, 3215 Campus Loop Road, Kennesaw, GA  
J-330 - University of West GA - Col, Carrollton, GA  
KSU Center, 3333 Busbee Drive NW, Kennesaw, GA  
GSU Window Restoration Monitoring, Atlanta, GA



GA EPD Lead Inspector,  
Certificate No. 60INS00215  
Control of Respirable  
Crystalline Silica Dust  
Training 40 Hr. HAZWOPER,  
Certificate No.  
2749407 8 Hr.  
HAZWOPER  
Certificate No.  
1608045175860  
Radiation Safety  
and Operation,  
Certificate  
No. RS0038000001TmqA  
Geo-Seal Certified Inspector  
472018

120 E Memorial Drive, Dallas, GA  
KSU Marietta Campus English  
Building, Marietta, GA  
Oglethorpe University-Goodman Hall  
Renov, Atlanta, GA  
897 South Milledge Avenue Site,  
Athens, GA  
Kennesaw State University-Student  
Center, Kennesaw, GA  
Mike Cottrell College of Business UNG  
BO, Dahlonega, GA  
Howell Hall, KSU - Marietta Campus,  
Marietta, GA  
Dalton State College Bandy Gym  
Student R, Dalton, GA  
Gwinnett Technical College Building  
100 , Lawrenceville, GA  
1398 Reinhardt College Parkway  
Site, Canton, GA  
Howell Hall Abatement, Marietta, GA  
Select Dormitories-Oglethorpe  
University, Atlanta, GA  
TCSG-334 North GA Technical  
College, Clarkesville, GA  
Colvard North, Level 2000  
Renovation, NC  
UNCC Student Counseling Center,  
Charlotte, NC  
UNCC Sycamore Hall Renovation,  
Charlotte, NC  
UNCC - Colvard 2000, NC  
New Cherokee Middle School "C", GA  
St. Pius X High School, GA  
Woodland HS Renovations,  
Cartersville, GA  
AHERA 3 Year, GA  
Our Lady of the Assumption School,  
GA  
Immaculate Heart of Mary AHERA, GA  
Decatur Schools AHERA, GA  
St. John Neumann Catholic School,  
GA  
758 Scott Boulevard, GA  
Decatur High School, GA  
Lovett Field House, GA  
1083 Marietta Hwy Site, GA  
Marist School - Enviro Services, GA  
Norcross Cluster Elm. School, GA

International Community School,  
Decatur, GA  
Dug Gap Elementary School Site,  
Dalton, GA  
Fulton Science Academy Site,  
Alpharetta, GA  
Valley Point Middle School  
Fieldhouse, Dalton, GA  
Jordan Hall, Atlanta, GA  
100 College Street, Adairsville, GA  
AHERA 3-Year Re-Inspection/Update  
to O&M, Decatur, GA  
Renfroe Middle School, Decatur, GA  
Pine Log Elementary School - 500  
Block, Rydal, GA  
KIPP South Fulton Academy, East  
Point, GA  
Renfroe Middle School Renovations,  
Decatur, GA  
Decatur High School, Decatur, GA  
ECLC Modular Classroom Site,  
Decatur, GA  
740 Cameron Alexander Blvd. Site,  
Atlanta, GA  
222 Piedmont Confirmatory Limited  
ACM, Atlanta, GA  
569 Martin Luther King Jr. Site,  
Atlanta, GA  
Cartersville Primary School,  
Cartersville, GA  
Decatur High School Renovations,  
Decatur, GA  
KIPP Vision Primary School, Atlanta,  
GA  
College Heights Early Childhood  
Learning, Decatur, GA  
Clairemont Elementary School,  
Decatur, GA  
Heard Mixon Elementary School - 2nd  
Grad, Covington, GA  
Clayton Co Information Technology  
Bldg, Atlanta, GA  
Winnona Park Elementary School,  
Decatur, GA  
East Point Auditorium Site, East  
Point, GA  
Oconee County Elementary School,  
Watkinsville, GA

Decatur City Schools AHERA, Decatur, GA  
Ficquett Elementary School, Covington, GA  
Atlanta Public Schools AHERA 3 Year Re-I, Atlanta, GA  
Renfroe Middle School, Decatur, GA  
540 Kentucky Street, Decatur, GA  
Multiple Sites-Alpharetta & Cumming GA, Alpharetta, GA  
City Schools of Decatur, Decatur, GA  
Renfroe Middle School-Limited Indoor Air, Decatur, GA  
Ficquett Elementary School, Newton, GA  
Decatur High School, Decatur, GA  
St. Jude Catholic School, Atlanta, GA  
Winnona Park Elementary School, Decatur, GA  
5710 Namon Wallace Drive Site, Cumming, GA  
1890 Donald Lee Howell Parkway, Atlanta, GA  
Booker T Washington High School, Atlanta, GA  
Atlanta Public Schools Legionella Sampli, Atlanta, GA  
APS Legionella Sampling Retesting, Atlanta, GA  
APS-Legionella Sampling Testing, Atlanta, GA  
Old Hickory Flat Gym, Canton, GA  
APS Legionella 2nd Event Re-Sampling, Atlanta, GA  
APS-Limited Fungir Air Assessment, Atlanta, GA  
City Schools of Decatur Legionella Sampl, Decatur, GA  
City School of Decatur Limited Drinking, Decatur, GA  
Existing Gymnasium - KIPP Soul Campus, Atlanta, GA  
Anson Co. Schools AHERA 3 Yr Re-Insp, Wadesboro, NC  
Kiddie Academy Site - Harrisburg Ph. I, Harrisburg, NC

#### Government

U.S. Courthouse/Post Office - Columbus, Columbus, GA  
GS-P-03-14-AZ-0028 Peachtree Summit Fed, Atlanta, GA  
U.S. Courthouse/Post Office - Columbus, Columbus, GA  
Sam Nunn Federal Building PDS, Atlanta, GA  
Columbus Federal Courthouse Site, Columbus, GA  
2630 Tuttle Building, Atlanta, GA  
Paulding County - New GA Library, Dallas, GA  
Ponce City Market, GA  
1.7-Acre Chattin Drive Site, GA  
Environmental Assessment-Clayton County, GA  
130 East Main Street, GA  
Cobb County Water Laboratory, GA  
Cherokee County Fire Station #17, GA  
555 Battlecreek Road, GA  
3121 Norman Berry Drive Site, East Point, GA  
Forsyth County Courthouse Site, Cumming, GA  
11575 Maxwell Road Site, Roswell, GA  
CDBG HOME Lead Assessment, Canton, GA  
Bells Ferry Station #1, Acworth, GA  
55 Savannah Street Site, Newnan, GA  
956 Univeter Road Site, Canton, GA  
242 Hames Road Site, Canton, GA  
511 Chattin Drive Site, Canton, GA  
Fire Station 11 Site, Canton, GA  
Cherokee County Historic Courthouse Site, Canton, GA  
310 Technology Parkway, Peachtree Corners, GA  
1467 Reinhardt College Parkway Site, Canton, GA  
Jones Building Renovations, Canton, GA  
204 Main Street Site, Adairsville, GA  
Fire Station 24, Canton, GA  
East Pointe Fire Station Site, East Point, GA  
East Point City Hall Limited Phase II, East point, GA

Juvenile Justice Center-Building C-  
Offic, Cumming, GA  
Fire Station 2 and Fire Station 3,  
Canton, GA  
Forsyth County Detention Center,  
Cumming, GA  
Cobb County Fire Station 7, Marietta,  
GA  
Juvenile Justice Center Courthouse,  
Cumming, GA  
Cherokee County Sheriff's Office -  
IAQ, Cherokee, GA  
Fire Station 15, Canton, GA  
430 Commerce Park Drive, Marietta,  
GA  
Fire Station 15, Canton, GA  
Juvenile Justice Center, Cumming, GA  
1.10-Acre Namon Wallace Road Site,  
Cumming, GA  
25 Jefferson Street, Newnan, GA  
Animal Services Site, Cumming, GA  
Douglas County Courthouse  
Renovations, Douglasville, GA  
Six Fulton County Libraries, College  
Park, GA  
Dick's Creek Water Reclamation  
Facility, Cumming, GA  
Cherokee County Historical Society  
Site, Canton, GA  
East Point City Hall - Radon Testing,  
East Point, GA  
8485 West Courthouse Square Road  
Site, Douglasville, GA  
11565 Maxwell Road Site, Atlanta,  
GA  
5130 South Jett Road Site,  
Woodstock, GA  
Dick's Creek Water Reclamation  
Facility/, Suwanee, GA  
Nicholson Library New Annex,  
Nicholson, GA  
Forsyth County Juvenile Court Site,  
Cumming, GA  
2115 Chloe Road Sexton Hall,  
Cumming, GA  
57 E Broad Street, Newnan, GA  
Escambia County, AL Courthouse  
ENV, Brewton, AL

Fulton County Courthouse Facility,  
Atlanta, GA  
Lee Arrendale Prison- BE Condition  
Asses, Alto, GA  
GBA-180 2 Capitol Square  
Renovation, GA  
GBA-181 Capitol Plaza, GA  
Fernbank Museum of Natural History,  
Atlanta, GA  
GBA-184 GEMA & Homeland Security  
Agency, Atlanta, GA  
DCY-104 Central PDC Conversion,  
Caldwell, GA  
GDOT Building Capital Square, GA  
Asheville Federal Courthouse Site,  
Asheville, NC  
Metro State Prison Site, Atlanta, GA  
GDPS Buildings 26 & 29, Atlanta, GA  
GEMHSA Bldgs 1 and 2, Atlanta, GA  
Augusta State Medical Prison,  
Augusta, GA  
Pulaski State Prison, Hawkinsville, GA  
Washington State Prison Dental  
Clinic, Davisboro, GA  
Arnall Building Site, Milledgeville, GA  
Lee Arrendale Prison- Envelope  
Cond., Alto, GA  
Metro State Prison - Phase 2,  
Atlanta, GA

#### Healthcare

South Dekalb Plaza-Humana,  
Decatur, GA  
Newnan Hospital Redevelopment, GA  
Dacula Medical Office Building, GA  
Hamilton Mill Medical Office Building,  
GA  
Newnan Hospital Redevelopment, GA  
Atlanta VA Specialty Outpatient Clinic,  
Decatur, VA  
1460 E. Victory Drive - ACM Survey,  
Savannah, GA  
113 Minis Avenue - ACM Survey,  
Garden City, GA  
475 Gateway Center Blvd. - ACM  
Survey, Brunswick, GA  
312 N. River Street - ACM Survey,  
Claxton, GA

1357 Hembree Road Site, Roswell, GA  
USRC Fitzgerald 0144 Site, Fitzgerald, GA  
1605 CHANTILY DRIVE SITE, Atlanta, GA  
Emory Winship at Midtown, Atlanta, GA  
Grady Health System Aldredge Bldg ENV, Atlanta, GA  
CDC Roybal East Parking Deck, Atlanta, GA  
Clinical Decision Unit Kennestone, Marietta, GA  
CDU Kennestone - Mastic Abatement, Marietta, GA  
400 S Pinetree Blvd-Southwestern State C, Thomasville, GA  
Woodbridge for Clinton Sr. Lvg. Asbestos, Clinton, NC  
Appalachian Regional HCS Expansion Ph. 1, Boone, NC

#### **Hotel**

North Decatur Road Properties, Atlanta, GA  
Piedmont Center - Suite 600, Atlanta, GA  
Stone Mountain Marriott Renovation, Stone mountain, GA

#### **Manufacturing**

Majestic Logistics Center-UPS, Atlanta, GA  
Glock Facility, GA  
Former Larkin Coils Inc. Facility, Atlanta, GA  
Stonewall Tell Road Site, Atlanta, GA  
Stonewall Tell Road Development Site, College Park, GA  
Lenny Boy Brewery - 3000 S. Tryon Asbest, Charlotte, NC  
1599 Memorial Drive, Atlanta, GA  
6300 Button Gwinnett Drive, Atlanta, GA  
Indian Trail Distribution Center, Lilburn, GA  
5000 Kristie Way, Chamblee, GA

#### **Multifamily/Mixed-Use**

Donald Lee Hollowell Parkway Project, Atlanta, GA  
Donald Lee Hollwell Project, Atlanta, GA  
Ponce City Market, GA  
8th and Spring St. Sewer Line Relocation, GA  
Ponce City Market - Parcel F, GA  
Oxford Encore (Special Inspections), GA  
250 East Ponce de Leon Parking Deck, Decatur, GA  
Peachtree & Stratford Development, Atlanta, GA  
563 Memorial Drive, Suites R1-R2-R3, Atlanta, GA  
39-Acre Collier Ridge Tract, Atlanta, GA  
ALTA Dairies, Atlanta, GA  
348 Mitchell Street - Environmental Serv, Atlanta, GA  
Memorial Drive Tract, Atlanta, GA  
20-Acre Halcyon Tract, Alpharetta, GA  
Canton Mills Apartments, Canton, GA  
Silica Dust Sampling-8 Hour TWA, Atlanta, GA  
Huff Road Tract, Atlanta, GA  
The Fields at Peachtree Corners Apartmen, Norcross, GA  
Anglier Avenue Tract, Atlanta, GA  
Canton Mill Apartments, Canton, GA  
1979 Mars Hill Road Site, Acworth, GA  
CPH No. W13775 WM XPS #86874 Gurley, AL, AL  
CPH No. W13766 WM XPS #86869 Grant, AL, AL  
CPH No. W13765 WM XPS #86870 Hokes Bluff, AL  
CPH No. W13805 WM XPS #87109 Campobello,, SC  
CPH No. W13776 WM XPS #86887 Gray Court, SC  
Ashley Place Apartments, Charlotte, NC

#### **Office**

425 Horizon Drive, GA

|                                                       |                                                        |
|-------------------------------------------------------|--------------------------------------------------------|
| GA Pacific 27th Floor Supplemental ACM, GA            | Environmental Consultation, Atlanta, GA                |
| GA Pacific - Loading Dock Asbestos Sampl, Atlanta, GA | 3750 Crown Road and 3849 Browns Mill Roa, Atlanta, GA  |
| Grant Building CAPEX Roof Replacement, Atlanta, GA    | The Candler Building Site, Atlanta, GA                 |
| Ponce City Market Service Building, GA                | Equitable Building, Atlanta, GA                        |
| MailChimp at PCM, GA                                  | 300 & 306 Luckie Street, Atlanta, GA                   |
| Atlantic Yards, Atlanta, GA                           | Grant Building Site, Atlanta, GA                       |
| Project Fusion, Atlanta, GA                           | Silica Dust Sampling - Multiple Projects, Marietta, GA |
| Project Fusion-Holder, Atlanta, GA                    | Peachtree Center Renovations ACM, Atlanta, GA          |
| Project Acorn, GA                                     | The Candler Building ACM Roof Sampling, Atlanta, GA    |
| 730 Peachtree Street, GA                              | 673 & 771 Juniper Street, Atlanta, GA                  |
| GA Pacific Center LBP, GA                             | 58 Hospital Road, Newnan, GA                           |
| West Peachtree & 14th Street, GA                      | Midtown Heights Site, Atlanta, GA                      |
| Yancey Augusta, GA                                    | One Baltimore Place, Atlanta, GA                       |
| 1000 Circle 75 Building, GA                           | Larkin Building B, Atlanta, GA                         |
| 2150 Parklake, GA                                     | Confidential - Project Fusion, Atlanta, GA             |
| 133 Univeter Road, GA                                 | 48th Floor ACM Sampling, Atlanta, GA                   |
| Heritage Maclellan Apartments, LLC, Chattanooga, TN   | Post Centennial Park Site, Atlanta, GA                 |
| Ponce City Market-7th Floor Air Testing, Atlanta, GA  | Peachtree Summitt Federal Building, Atlanta, GA        |
| 359 East Paces Ferry, Atlanta, GA                     | 1600 Dunwoody Club Drive Site, Atlanta, GA             |
| 2700 Delk Road Site, Marietta, GA                     | Lifecycle Building Center, Atlanta, GA                 |
| Zep Facility - 1360 Annex, Atlanta, GA                | 330 Auburn Avenue, Atlanta, GA                         |
| 1776 Peachtree Street Site, Atlanta, GA               | 22 7th Street & 21 8th Street, Atlanta, GA             |
| The Candler Building, Atlanta, GA                     | 25th Floor Montag Server Room, Atlanta, GA             |
| Proposed NCR Office Development Site, Atlanta, GA     | GA Pacific Renovations Ph III & IV, Atlanta, GA        |
| 222 Piedmont Avenue NE, Atlanta, GA                   | 1400 Lake Hearn Drive, Atlanta, GA                     |
| Barrett Business Center Site, Kennesaw, GA            | 3225 Cumberland Blvd Site, Atlanta, GA                 |
| CryoLife Renovations, Kennesaw, GA                    | 760 Herlong Avenue Site, Rock Hill, SC                 |
| The Pointe at CommNet, Atlanta, GA                    | 1900 Lake Park Drive, Smyrna, GA                       |
| 6105 Peachtree Dunwoody Site, Sandy Springs, GA       | GA Pacific-Supplemental Sampling, Atlanta, GA          |
| 1905 Scenic Highway Site, Snellville, GA              | 7 East Building, Newnan, GA                            |
| GA Pacific Center Renovations Phase, Atlanta, GA      | Solomon and Martin Street Site, Atlanta, GA            |
| SGPS-Suite 410 Expansion, Norcross, GA                | 1439 Peachtree Street, Atlanta, GA                     |
| Old Genuine Parts Building, Atlanta, GA               | 1330 West Peachtree Street Site, Atlanta, GA           |
| 1700 Commerce Drive, Atlanta, GA                      |                                                        |

202 Milton Avenue SE, Atlanta, GA  
795 South Cobb Drive Expansion,  
Marietta, GA  
Waldo's Old Fourth Yard Project,  
Atlanta, GA  
1850 Parkway Place, Marietta, GA  
GMA Office Renovations, Atlanta, GA  
Promenade II - 18th Floor, Atlanta, GA  
550 Farr Building 2nd and 3rd Floor,  
Atlanta, GA  
1944 Piedmont Site, Atlanta, GA  
Docutab Site, Atlanta, GA  
Tuttle Building Hazardous Materials,  
Atlanta, GA  
27 8th Street, Atlanta, GA  
Stone Mountain 3rd Floor, Stone  
Mountain, GA  
75 Atlanta Street, Marietta, GA  
111 John Wesley Dobbs Avenue,  
Atlanta, GA  
Lake Mirror Road Site, Forest Park,  
GA  
1044 Booth Road Site Warner  
Robins, GA, Warner Robbins, GA  
1975 Lakeside Parkway, Tucker, GA  
748 Virginia Avenue, Hapeville, GA  
GA's Own IAQ, Atlanta, GA  
75 Bennett Street NW, Atlanta, GA  
170 Mitchell Street SW, Atlanta, GA  
Kennesaw First Baptist, Kennesaw,  
GA  
Hampton Inn Project, Atlanta, GA  
Concourse One - Mastic Sampling,  
Atlanta, GA  
2329 Cheshire Bridge Road Site,  
Atlanta, GA  
Tuttle Building Suite 233, Atlanta,  
GA  
Former Johns Creek Rite Aid Radon,  
Johns Creek, GA  
1111 Quintard Avenue Site, Anniston,  
NC  
2730 & 2732 Candler Road, Decatur,  
GA  
100 Peachtree Street, Atlanta, GA  
335A Academy Drive Site, Dallas, GA  
1170 Howell Mill Road Fungi, Atlanta,  
GA

Asbestos Containing Material  
Awareness T, Atlanta, GA  
Project Fusion, Atlanta, GA  
Sharon Towers Development  
Environmental, Charlotte, NC  
1451 Bryant Street Asbestos & Paint  
Surv, Charlotte, NC  
305 Doggett Street ENV, Charlotte,  
NC  
3811 Kimwell Drive ACM & LBP  
Survey, Winston-Salem, NC

### Recreational

Atlanta United Training Ground -  
Academy, Marietta, GA  
72 GA Avenue, Atlanta, GA  
Herodian Way 10-Acre Outparcel, GA  
Warren/Holyfield Boys and Girls Club,  
Atlanta, GA  
Harland Boys & Girls Club Site,  
Atlanta, GA  
Utopian Center for the Arts  
Subsurface E, Riverdale, GA  
3350 Gwinnett Place Drive Site,  
Duluth, GA

### Religious

St. John The Evangelist, Atlanta, GA  
St. JohnThe Evangelist, GA  
Central Baptist Church Additions,  
Newnan, GA  
St. Jude the Apostle AHERA, GA  
Saint Peter Claver Catholic School  
AHERA, GA  
St. Pius Catholic HS Ahera, GA  
Christ the King Catholic School, GA  
Beth Jacob of Atlanta, GA  
4900 Ivey Road - 9.33 Acre Lot,  
Acworth, GA  
First Baptist Church of Newnan  
Renovatio, Newnan, GA  
810 Joseph E. Boone Blvd. Site,  
Atlanta, GA  
Our Lady of the Mount Roman  
Catholic Chu, Lookout Mountain, GA  
Cathedral of St. Philip Renovations,  
Atlanta, GA  
Our Lady of the Mount Roman  
Catholic Chu, Lookout Mountain, GA

Cathedral of Christ the King  
Renovations, Atlanta, GA  
Cathedral of Christ the King  
Renovations, Atlanta, GA  
Westminster Presbyterian Church-  
Sanctuary, Atlanta, GA  
Cathedral of Christ the King  
Gymnasium, Atlanta, GA  
1255 Collier Road Site, Atlanta, GA  
Our Lady of Mount Roman Catholic  
Church, Lookout Mountain, GA  
St. Jude Catholic School, Atlanta, GA  
4280 Atlanta Road, Smyrna, GA  
AHERA 3 Year Re-Inspection/Our  
Lady of t, Atlanta, GA  
Interfaith Outreach Home Site,  
Doraville, GA  
Basilica of the Sacred Heart of Jesus  
Si, Atlanta, GA  
St. Jude AHERA 3 Year Re-Inspection,  
Atlanta, GA  
St. Jude the Apostle Catholic Church,  
Sandy Springs, GA  
St. John Neumann Catholic Church,  
GA  
Selwyn Ave Presbyterian Church -  
Asbesto, Charlotte, NC

#### **Residential**

Residential Tower & Parking Deck, GA  
198 Old Hull Road Site, Athens, GA  
3455 Old AL Road, GA  
6024 and 6038 Roswell Road, GA  
Mabry Road Tract, GA  
Oak Forest Circle Tract, GA  
Oakridge Plantation Tract, GA  
3rd and Peachtree, GA  
2420 Peachtree Road Site, GA  
6151 Avery Street, GA  
935 Confederate Avenue Bldg 18, GA  
1000 West Peachtree Street, Atlanta,  
GA  
12th Street Project, Atlanta, GA  
312 South Candler Street Site,  
Decatur, GA  
455 Coleman Drive Site, Roswell, GA  
Residential Site - Loxley, AL, Loxley,  
GA

824 Santa Fe Trail Site, Woodstock,  
GA  
33059 Residential Site, Loxley, AL  
1719 Scenic Road ACM, Snellville, GA  
Ponce De Leon Project, Atlanta, GA  
504 Thrasher Street, Norcross, GA  
Lenbrook Expansion, Atlanta, GA  
West Wieuca Road Tract, Atlanta, GA  
Central Baptist Church Additions,  
Newnan, GA  
701 and 711 North Price Road,  
Buford, GA  
Lidl 690 Holcomb Bridge Road,  
Roswell, GA  
2015 Memorial Tract Drive, Atlanta,  
GA  
Peachtree City Site, Peachtree City,  
GA  
Dilbeck Road Tract, Atlanta, GA  
Shepherd Center Share Apartments,  
Atlanta, GA  
1722 Harbin Road SW, Atlanta, GA  
Tatum Road Property, Palmetto, GA  
933 Kirkwood Avenue SE, Atlanta, GA  
Eleven Residential Structures,  
Austell, GA  
1072 West Peachtree Street, Atlanta,  
GA  
Hapeville Assemblage-60 Parcels,  
Hapeville, GA  
566 Church Street, Marietta, GA  
848 Tanner Road Site, Greenville, SC  
Hampton Court Apartments, GA  
Bradley Park Apartments, Cumming,  
GA  
Brookside Heights Apartments,  
Cumming, GA  
Greenville Downtown Lofts,  
Greenville, SC  
S. Suber Road Lead & Asbestos  
Survey, Greer, SC  
2444 Vail Avenue Pre-Demo,  
Charlotte, NC

#### **Retail**

Procter & Gamble, GA  
Laundry Commons, GA  
Tarrant City Family Dollar, AL  
Tri-Cities Plaza, GA

OxBlue Corporation Building  
Renovation, GA  
2865 Log Cabin Drive Site, GA  
Floor & Decor - Buford Store, Buford,  
GA  
Twelve Greater Atlanta Area Sites,  
Greater Atlanta Area, GA  
Stonecrest Mall - H & M, Lithonia, GA  
Stonecrest Mall Site, Lithonia, GA  
1599/1605 Memorial Drive Sites,  
DeKalb, GA  
3760 & 3780 South Cobb Drive Site,  
Smyrna, GA  
Franklin Plaza Shopping Center,  
Marietta, GA  
1402 Brevard Road Site Phase I ESA  
Updat, Asheville, NC  
Atlantic Station - T3 West Midtown,  
Atlanta, GA  
Atlantic Station - Block C, Atlanta, GA  
129 North Avenue, Atlanta, GA  
Atlantic Station Buildings 5 and 6  
Demo, Atlanta, GA  
Underground Atlanta Mold Sampling,  
Atlanta, GA  
NTB 930-Anderson, SC, Atlanta, GA  
10102 Main Street Site, Woodstock,  
GA  
Phase II - Alta Dairies, Atlanta, GA  
NTB - 885 Marathon Parkway,  
Lawrenceville, GA  
30 Ac. Johnston Road-Providence  
West Sit, Charlotte, NC  
Underground Atlanta Block 3 & 4,  
Atlanta, GA  
Presidential Markets Shopping  
Center Sui, Snellville, GA  
North Point-Former Babies R Us,  
Alpharetta, GA  
Atlanta Underground Supplemental  
Samplin, Atlanta, GA  
Atlanta Dairies Music Venue, Atlanta,  
GA  
Hapeville Theater, Hapeville, GA  
Ponce City Market ACM, Atlanta, GA  
Presidential Markets Shopping Ctr  
#110, Snellville, GA  
Sandtown Crossing, Atlanta, GA

Bo Ginn Aquarium Site, College Park,  
GA  
1020 Spring Street, Atlanta, GA  
Dirty Dogs Car Wash - Douglasville,  
Douglasville, GA  
Atlanta Mission Ethel Street Shelter,  
Atlanta, GA  
Presidential Markets Shopping  
Center-AMC, Snellville, GA  
Amsterdam Walk, Atlanta, GA  
5500 Frontage Road, Forest Park, GA  
Former Johns Creek Rite Aid Radon,  
Johns Creek, GA  
3201 Peachtree Corners Circle,  
Peachtree Corners, GA  
Frito-Lay Sites, Spanish fort, AL  
2772 Candler Road, Decatur, GA  
862 Harbins Road, Dacula, GA  
Lidl Norcross Jimmy Carter Blvd,  
Norcross, GA  
4285 Washington Road, Evans, GA  
2172 Lawrenceville Suwanee Road,  
Suwanee, GA  
Walmart Express - Dawson, GA ENV,  
GA  
Walmart Express - Pelham, GA ENV,  
GA  
Waldo Rood Site - Pet Palace, Cary,  
NC

### Transportation

DOT-74A Welcome Ctr - South(Lake  
Park), Lake Park, GA  
GDOT MMIP 400 Exp Lanes  
PI#0001757, Kennesaw, GA  
GDOT I-285 @ I-20 W Interch PI  
#0013918, Various, GA  
GDOT Master On-Call Drilling  
Contract, Carroll, GA  
GDOT I-285 @ I-20 West Interchange  
TO#4, Various, GA  
Delta Museum, GA  
Henry County Roadway, McDonough,  
GA  
Andrew Jackson Highway Tract  
LBP/ACM Sur, Charlotte, NC  
GDOT GEC MMIP I-285/I-20 E.  
Interchange, Kennesaw, GA



GDOT SR3 CONN @ CR392 Upper  
Riverdale Rd, Riverdale, GA  
US 17 Bridge Replmnt. over Edisto  
River, Columbia, SC  
SCDOT US1 Bridge Repl. over Shaws  
Creek, Charleston, SC

**Utilities**

GA Pacific Center Renovations,  
Atlanta, GA

**Water/Wastewater**

Riverside Drive WTP-Chemical Bldg,  
Gainesville, GA  
Oglethorpe University Residential  
Covid in Water Sampling  
Atlanta, GA

---

# ***The Environmental Institute***

---

---

## ***Curtis Moses***

---

Social Security Number - XXX-XX-9977

Nova Engineering & Environmental - 3900 Kennesaw 75 Parkway, Kennesaw, GA 30144

*Has completed 4 hours of coursework and satisfactorily  
passed an examination that meets all criteria required for  
EPA/AHERA/ASHARA (TSCA Title II) Approved Reaccreditation*

*Asbestos in Buildings: Inspector Refresher*

May 13, 2025

Course Date

20466


Certificate Number


May 13, 2025

Examination Date

May 13, 2026

Expiration Date

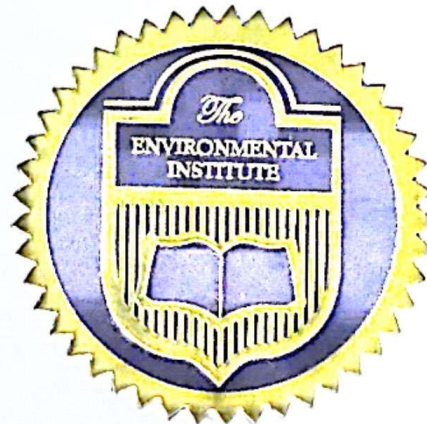

  
Beverly B. Campbell - Principal Instructor/Training Manager

(Approved by the ABIH Certification Maintenance Committee for 1/2 CM point - Approval #11-577)  
Florida Accreditation #0002805; Tennessee Accreditation #A-TP-IR-148-139089; Alabama Accreditation # SS-2210-ASBTPR-01  
TEI - 9755 Dogwood Road, Suite 350, Roswell, GA 30075  
Phone: 770-427-3600 - Website: [www.tei-atl.com](http://www.tei-atl.com)

# The Environmental Institute

## Curtis Moses

Social Security Number - XXX-XX-9977

Nova Engineering & Environmental - 3900 Kennesaw 75 Parkway, Kennesaw, GA 30144

*Has completed 8 hours of coursework and satisfactorily passed the hands-on skills assessment and an examination that meets training criteria in accordance with requirements for Lead-Based Paint Activities in Target Housing and Child-Occupied Facilities as regulated by Georgia DNR/EPD Chapter 391-3-24 and U. S. EPA TSCA 40 CFR Part 745 for the refresher course titled*

### *Lead Inspector Refresher*

May 20, 2024

Course Date

May 20, 2024


Examination Date

May 20, 2026

Georgia Expiration Date

May 20, 2027

EPA Expiration Date

  
Bonnie B. Maurras- Principal Instructor/Training Manager

2141

Certificate Number



(Approved by the ABIH Certification Maintenance Committee for 1 CM point - Approval #11-584)

Georgia Accreditation #20-0799-006SR - September 21, 1999; Alabama Accreditation #20-021022-33826

Tennessee Accreditation #FTN-2000-883-8004R; EPA Accreditation #LBP-I-R-1123-3-EN

TEI - 1395 S. Marietta Parkway SE - Building 100, Suite 124 - Marietta, GA 30067

Phone: 770-427-3600 - Website: [www.tei-atl.com](http://www.tei-atl.com)

## APPENDIX D

### QUALIFICATIONS OF CONCLUSIONS

## QUALIFICATIONS OF CONCLUSIONS

The findings and opinions presented are relative to the dates of our site work and should not be relied on to represent conditions at substantially later dates or locations not investigated.

The opinions included herein are based on information obtained during the study and our experience. If additional information becomes available which might impact our environmental conclusions, we request the opportunity to review the information, reassess the potential concerns and modify our opinions, if necessary.

Assessments may include interviews, a review of documents prepared by others or other secondary information sources. NOVA has not verified the provided information and has no responsibility for the accuracy or completeness of the information.

Although this assessment has attempted to identify the potential for environmental impacts to the subject property, potential sources of contamination may have escaped detection due to: (1) the limited scope of this assessment, (2) the inaccuracy of public records, (3) the presence of undetected or unreported environmental incidents, (4) inaccessible areas and/or (5) deliberate concealment of detrimental information. It was not the purpose of this study to determine the actual presence, degree or extent of contamination at the site, except as specifically described in the previous sections of this report. This would require additional exploratory work, including supplemental sampling and laboratory analysis.

This report is intended for the sole use of ***City of Griffin***. The scope of work performed during this was developed for purposes specifically intended by ***City of Griffin*** and may not satisfy other user requirements. Use of this report or the findings and conclusions by others will be at the sole risk of the user.

Our professional services have been performed, our findings obtained, our conclusions derived and our recommendations prepared in accordance with generally accepted engineering practices and principles. This statement is in lieu of all other statements or warranties, either expressed or implied.